

TOMORROW starts here.



Cisco *live!*

Highly Available Wide Area Network Design

BRKRST-2042

Stephen Lynn
Consulting Systems Architect


Agenda

- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
- Design and Deployment
- Final Wrap Up

Goals

- Design a WAN to efficiently utilise available bandwidth
- Design a WAN to dynamically respond to all types of disruptions
- Leverage most effective design techniques that meet the design requirements

Where Can Outages Occur?

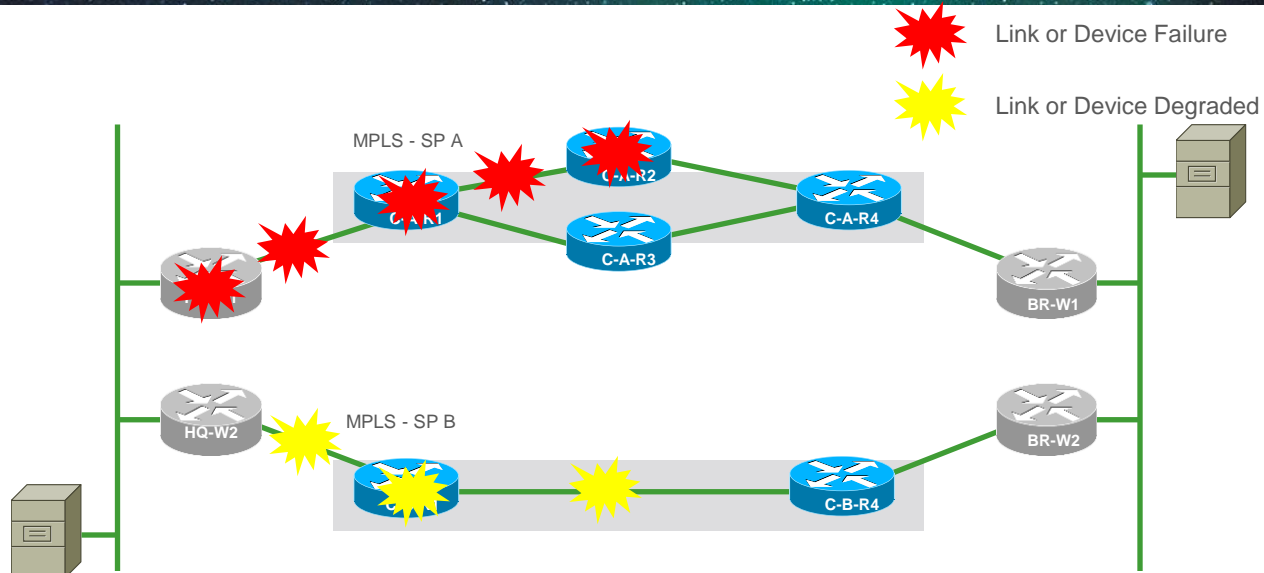

- How does outage manifest?
- How quickly can network detect?
- How long is bidirectional reconvergence?

Session Scope

- What methods are used for path selection and packet forwarding
- How does the network detect outages
- Focus on network survivability and effective utilisation rather than sub-second convergence
- Does not address “zero loss” considerations

Agenda

- Introduction
- Cisco IOS and IP Routing
 - Multiple Links/Multiple Paths
 - Load Sharing
- Convergence Techniques
- Design and Deployment
- Final Wrap Up

Routing Table Basics

Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

```
D*EX 0.0.0.0/0 [170/3328] via 10.4.128.1, 21:44:37, Port-channel1
      10.0.0.0/8 is variably subnetted, 27 subnets, 6 masks
C      10.4.128.0/30 is directly connected, Port-channel1
D      10.4.128.8/30 [90/1792] via 10.4.128.1, 21:44:37, Port-channel1
D      10.4.128.128/26 [90/3072] via 10.4.128.1, 21:44:37, Port-channel1
D      10.4.128.240/32 [90/129536] via 10.4.128.1, 21:44:37, Port-channel1
C      10.4.128.241/32 is directly connected, Loopback0
D      10.4.128.244/32 [90/129792] via 10.4.128.1, 21:44:37, Port-channel1
C      10.4.142.0/29 is directly connected, GigabitEthernet0/0/4
B      10.4.142.32/30 [20/0] via 10.4.142.2, 21:44:01
B      10.4.142.144/30 [20/0] via 10.4.142.2, 21:44:01
B      10.4.143.0/29 [200/0] via 10.4.128.242, 21:44:01
```



Administrative Distance

- The **distance** command is used to configure a rating of the trustworthiness of a routing information source, such as an individual router or a group of routers
- Numerically, an administrative distance is a positive integer from 1 to 255. In general, the higher the value, the lower the trust rating
- An administrative distance of 255 means the routing information source cannot be trusted at all and should be ignored

Route Source	Default Distance
Connected Interface	0
Static Route	1
EIGRP Summary Route	5
BGP external (eBGP)	20
EIGRP internal	90
OSPF	110
IS-IS	115
RIP	120
EIGRP External	170
BGP Internal (iBGP)	200
Unknown	255

Route Selection


- How is administrative distance used to determine which route should be installed?
- Only identical routes are compared
 - Identical prefixes with different prefix lengths are not the same route
- The route from the protocol with the lower administrative distance is installed

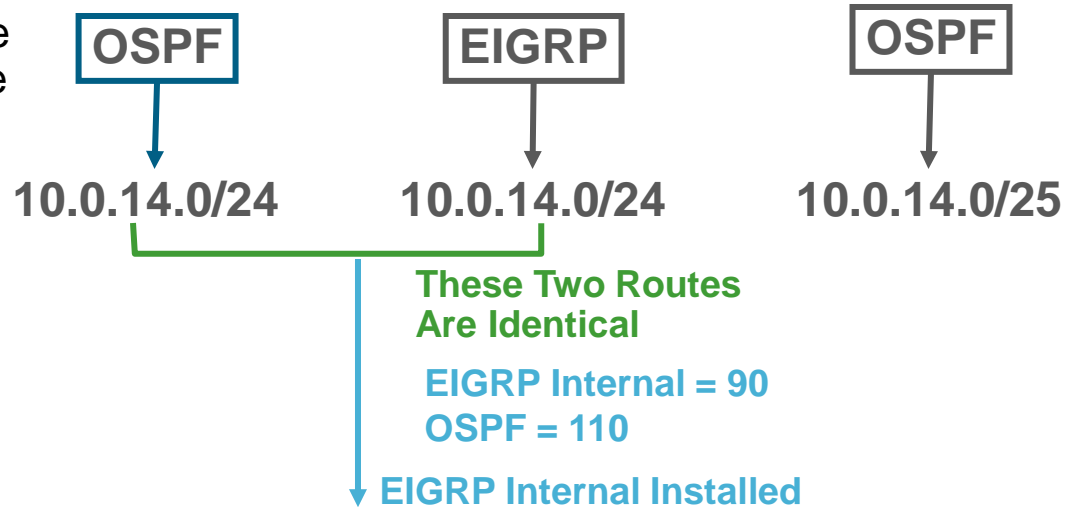

```
router#show ip route 10.0.14.0 255.255.255.0
Routing entry for 10.0.14.0/24
  Known via "eigrp 1", distance 90, metric 307200, type internal
  Redistributing via eigrp 1
  Last update from 10.0.121.2 on Ethernet0/1, 00:01:32 ago
Routing Descriptor Blocks:
* 10.0.121.2, from 10.0.121.2, 00:01:32 ago, via Ethernet0/1
  Route metric is 307200, traffic share count is 1
  Total delay is 2000 microseconds, minimum bandwidth is 10000 Kbit
  Reliability 255/255, minimum MTU 1500 bytes
  Loading 1/255, Hops 1
```

Route Selection

- How is administrative distance used to determine which route should be installed?
- Only identical routes are compared
 - Identical prefixes with different prefix lengths are not the same route
- The route from the protocol with the lower administrative distance is installed

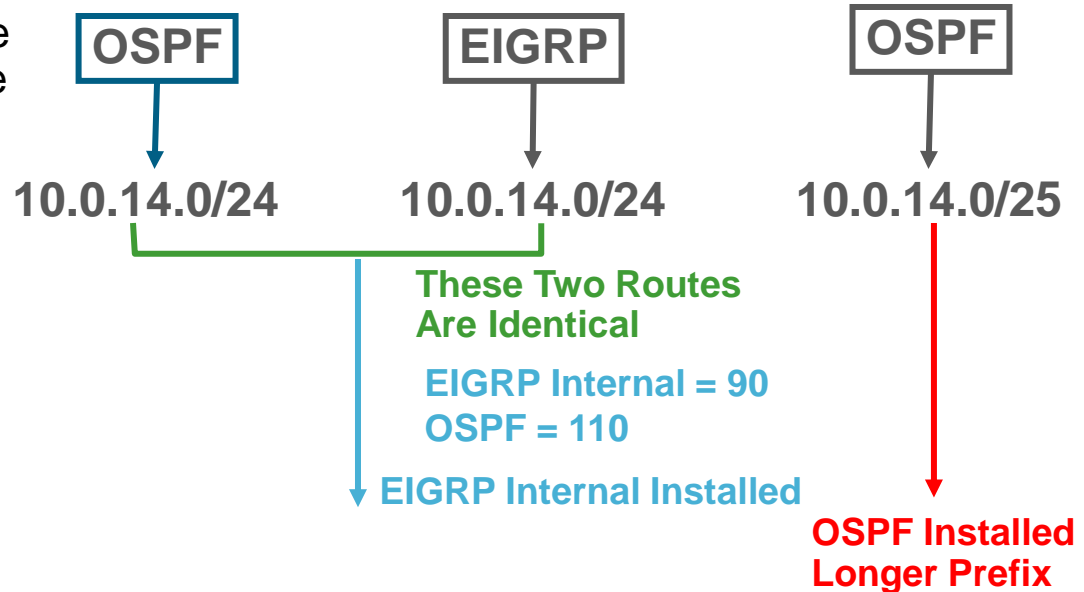

```
router#show ip route 10.0.14.0 255.255.255.0 longer-prefixes
 10.0.0.0/8 is variably subnetted, 9 subnets, 3 masks
D    10.0.14.0/24 [90/307200] via 10.0.121.2, 00:01:35, Ethernet0/1
O    10.0.14.0/25 [110/20] via 10.0.122.2, 00:00:50, Ethernet0/2
O    10.0.14.128/25 [110/20] via 10.0.122.2, 00:00:50, Ethernet0/2
```

More Specific OSPF Override EIGRP

Agenda

- Introduction
- Cisco IOS and IP Routing
 - Multiple Links/Multiple Paths
 - Load Sharing
- Convergence Techniques
- Design and Deployment
- Final Wrap Up

Load Sharing

- Assume the same routing process attempts to install two routes for the same destination in the RIB
- The routing process may allow the second route to be installed based on its own rules

	OSPF	IS-IS	EIGRP
Route Cost	Must be equal to installed route	Must be equal to installed route	Must be less than the variance times the lowest cost installed route
Maximum Paths	Must be fewer than <i>maximum-paths</i> configured under the routing process (default = 4)		

Note: BGP default value for maximum-paths = 1

CEF Load Sharing

Per-Session	Per-Packet
Default behaviour of IOS	Requires “ip load-sharing per-packet” interface configuration
Per-flow using source/destination	Per-packet using round-robin method
Packets for a given source/ destination session will take the same path	Packets for a given source/ destination session may take different paths
More effective as the number of source to destination pairs increase	Ensures traffic is more evenly distributed over multiple paths
Ensures that traffic for a given session arrives in order	Potential for packets to arrive out of sequence

Load Sharing

```
router#show ip route 192.168.239.0
Routing entry for 192.168.239.0/24
  Known via "eigrp 100", distance 170, metric 3072256, type external
  Redistributing via eigrp 100
  Last update from 192.168.245.11 on Serial3/1, 00:18:17 ago
  Routing Descriptor Blocks:
  * 192.168.246.10, from 192.168.246.10, 00:18:17 ago, via Serial3/0
    Route metric is 3072256, traffic share count is 1
    ....
  192.168.245.11, from 192.168.245.11, 00:18:17 ago, via Serial3/1
    Route metric is 3072256, traffic share count is 1
    ....
```

The Traffic Share Count Is Critical to Understanding the Actual Load Sharing of Packets Using These Two Routes

$$3072256/3072256 = 1$$

Load Sharing – with EIGRP Variance

```
router#show ip route 192.168.239.0
Routing entry for 192.168.239.0/24
  Known via "eigrp 100", distance 170, metric 3072256, type external
  Redistributing via eigrp 100
  Last update from 192.168.245.11 on Serial3/1, 00:18:17 ago
  Routing Descriptor Blocks:
  * 192.168.246.10, from 192.168.246.10, 00:18:17 ago, via Serial3/0
    Route metric is 1536128, traffic share count is 2
    ....
  192.168.245.11, from 192.168.245.11, 00:18:17 ago, via Serial3/1
    Route metric is 3072256, traffic share count is 1
    ....
```

If the Lower Metric Is Less than the Second Metric, the Traffic Share Count Will Be Something Other than 1 (EIGRP with Variance Configured)

$$3072256/3072256 = 1$$

$$3072256/1536128 = 2$$

2x Faster Link Gets 2 Flows vs. 1 Flow

Load Sharing – with eBGP dmzlink-bw

```
router#show ip route 192.168.239.0
Routing entry for 192.168.239.0/24
  Known via "bgp 1", distance 20, metric 0
  Tag 2, type external
  Last update from 10.0.122.2 00:00:16 ago
  Routing Descriptor Blocks:
```

```
  10.0.122.2, from 10.0.122.2, 00:00:16 ago
    Route metric is 0, traffic share count is 1
    .....
```

```
  * 10.0.121.2, from 10.0.121.2, 00:00:16 ago
    Route metric is 0, traffic share count is 2
    .....
```

```
router#show ip bgp 192.168.239.0
BGP routing table entry for 192.168.239.0/24, version 9
Paths: (2 available, best #2, table default)
Multipath: eBGP
```

```
  .....
```

```
  10.0.122.2 from 10.0.122.2 (10.0.0.2)
    Origin IGP, metric 0, localpref 100, valid, external, multipath(oldest)
```

```
    DMZ-Link Bw 312 kbytes
    rx pathid: 0, tx pathid: 0
    .....
```

```
  10.0.121.2 from 10.0.121.2 (10.0.0.2)
    Origin IGP, metric 0, localpref 100, valid, external, multipath, best
```

```
    DMZ-Link Bw 625 kbytes
    rx pathid: 0, tx pathid: 0x0
```

Only Available with
eBGP Neighbours


2x Faster Link Gets 2 Flows vs. 1 Flow

Agenda

- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
 - First Hop Redundancy Protocols
 - Routing Protocols
 - DDR and Static Routing
 - Performance Routing
- Design and Deployment
- Final Wrap Up

First Hop Redundancy Protocols (FHRP)

Failure Protection for the First Hop IP Router

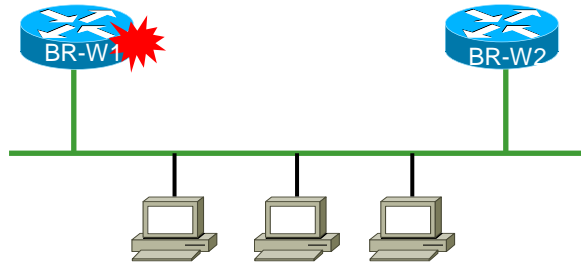


- Hot Standby Router Protocol (HSRP)
- Virtual Router Redundancy Protocol (VRRP)
- Gateway Load Balancing Protocol (GLBP)

Drivers for FHRPs

- Provide routing redundancy for access layer
 - How to handle failover when end-hosts have only a single IP default gateway and cached ARP entry
- Provide routing redundancy for devices that depend on static routing
 - Some firewalls do not support dynamic routing
- Independent of routing protocols
 - Works with any routing protocol and static routing
- Capable of providing sub-second failover
- Provides load sharing capabilities (GLBP) transparent to end host

Hot Standby Routing Protocol (HSRP)

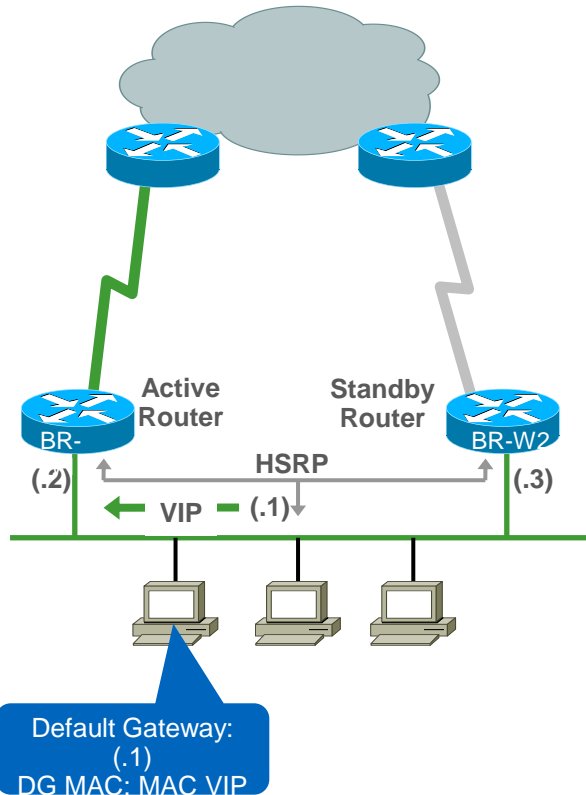


```
BR-W1#  
interface FastEthernet0/0  
ip address 10.1.2.2 255.255.255.0  
standby 1 priority 110  
standby 1 preempt  
standby 1 ip 10.1.2.1
```

```
BR-W1# show standby brief  
Interface Grp Prio P State Active Standby Virtual IP  
Fa0/0 1 110 P Active local 10.1.2.3 10.1.2.1
```

```
BR-W2#  
interface FastEthernet0/0  
ip address 10.1.2.3 255.255.255.0  
standby 1 priority 105  
standby 1 preempt  
standby 1 ip 10.1.2.1
```

```
BR-W2# show standby brief  
Interface Grp Prio P State Active Standby Virtual IP  
Fa0/0 1 105 P Standby 10.1.2.2 local 10.1.2.1
```

Hot Standby Routing Protocol (HSRP) IPv6

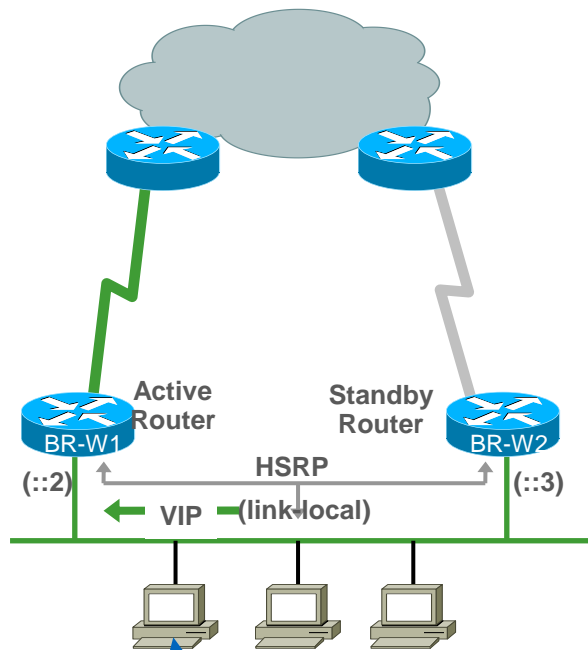

Default Gateway:
Learned via RA

```
BR-W1#  
interface FastEthernet0/0  
  ipv6 address  
  2001:DB8:C15:C002::2/64  
  standby version 2  
  standby 2 priority 110  
  standby 2 preempt  
  standby 2 ipv6 autoconfig
```

```
BR-W1# show standby brief
```

Interface	Grp	Prio	P	State	Active	Standby	Virtual IP
Fa0/0	2	110	P	Active	local	FE80::A8BB:CCFF:FE00:600	FE80::5:73FF:FEA0

:2

```
BR-W2#  
interface FastEthernet0/0  
  ipv6 address  
  2001:DB8:C15:C002::3/64  
  standby version 2  
  standby 2 priority 105  
  standby 2 preempt  
  standby 2 ipv6 autoconfig
```

```
BR-W2# show standby brief
```


Interface	Grp	Prio	P	State	Active	Standby	Virtual IP
Fa0/0	2	105	P	Standby	FE80::A8BB:CCFF:FE00:500	local	FE80::5:73FF:FEA0

:2

HSRP—Global IPv6
Addresses

- 12.2(33)SXI4
- 15.0(1)SY
- 15.3(2)T
- 15.3(1)S
- 15.1(1)SG


Hot Standby Routing Protocol (HSRP)

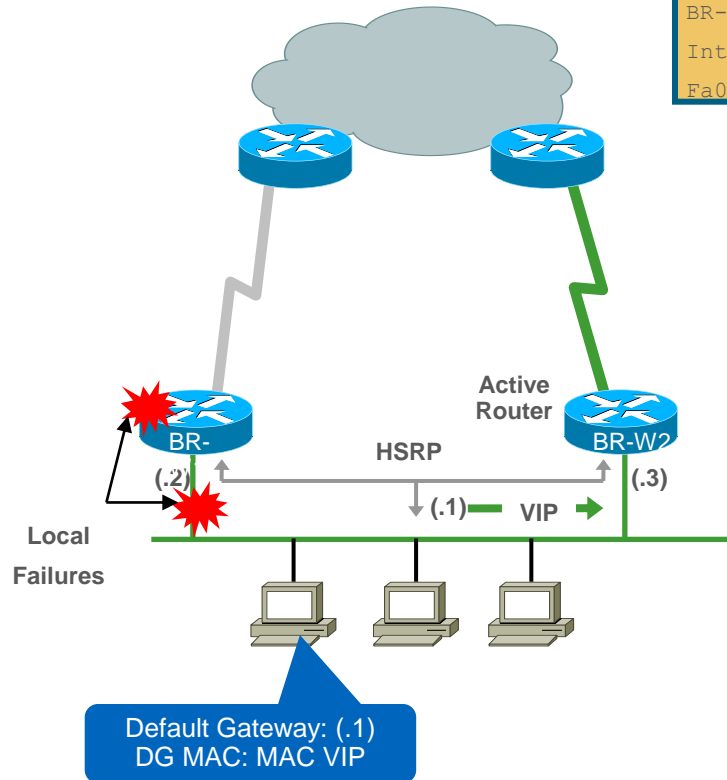

```
BR-W2# show standby brief
```


Interface	Grp	Prio	P	State	Active	Standby	Virtual IP
Fa0/0	1	105	P	Active	local	unknown	10.1.2.1

Hot Standby Routing Protocol (HSRP)

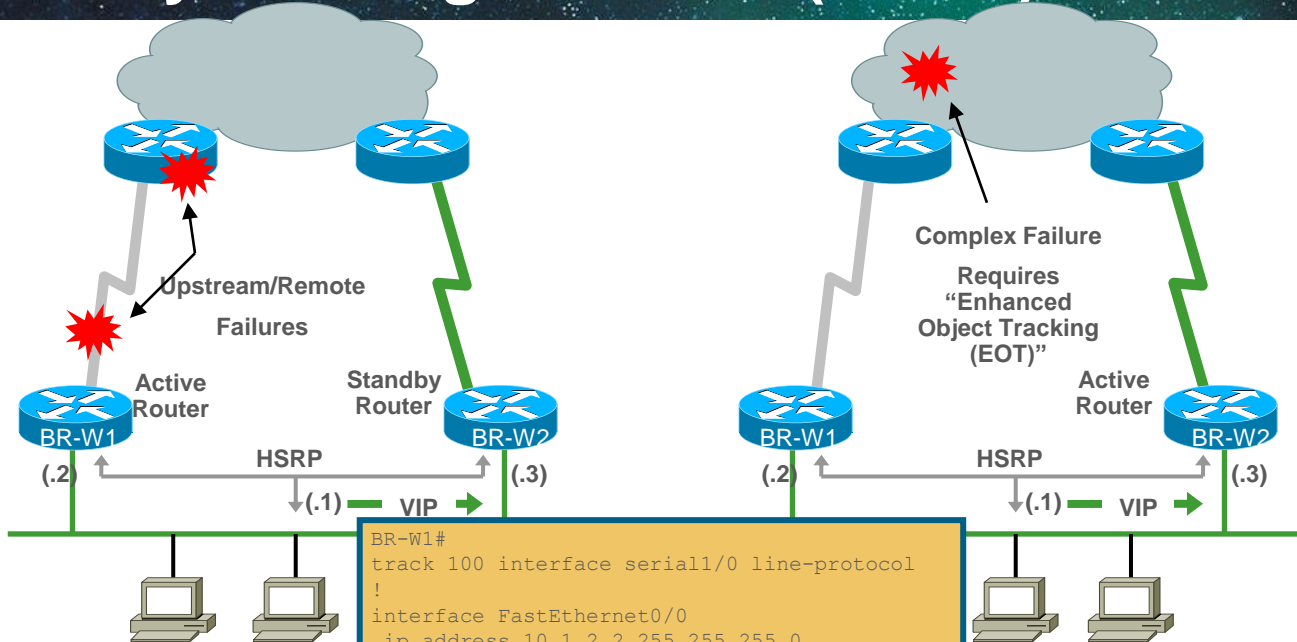

```
BR-W1#  
track 100 interface serial1/0 line-protocol  
!  
interface FastEthernet0/0  
ip address 10.1.2.2 255.255.255.0  
ipv6 address 2001:DB8:C15:C002::2/64  
standby version 2  
standby 1 preempt  
standby 1 priority 110  
standby 1 track 100 decrement 10  
standby 1 ip 10.1.2.1  
standby 2 preempt  
standby 2 priority 110  
standby 2 track 100 decrement 10  
standby 2 ipv6 autoconfig
```


Gateway Load Balancing Protocol (GLBP)

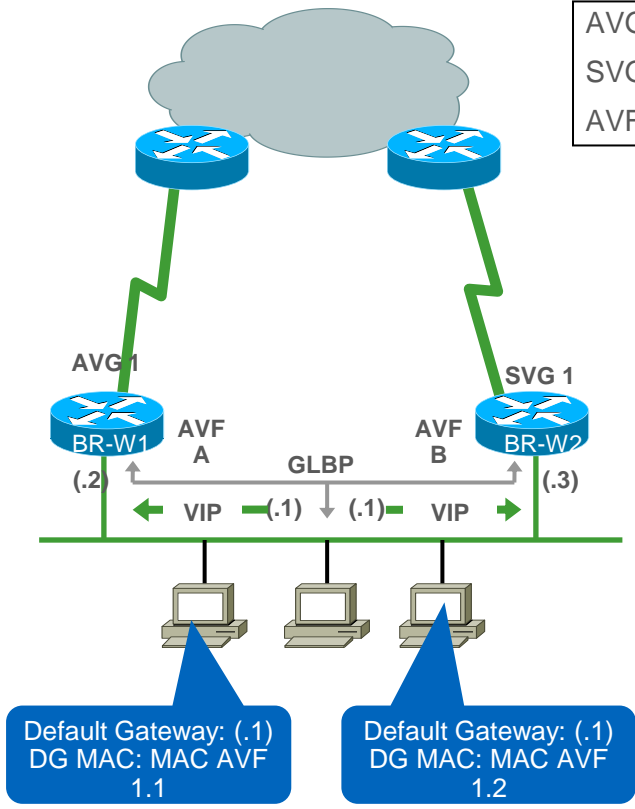

AVG = Active Virtual Gateway
SVG = Standby Virtual Gateway
AVF = Active Virtual Forwarder

```
BR-W1#
interface FastEthernet0/1
ip address 10.1.2.2 255.255.255.0
glbp 1 priority 110
glbp 1 preempt
glbp 1 ip 10.1.2.1
glbp 1 load-balancing round-robin
```

BR-W1# show glbp brief

Interface	Grp	Fwd	Pri	State	Address	Active Router	Standby Router
Fa0/1	1	-	110	Active	10.1.2.1	local	10.1.2.3
Fa0/1	1	1	-	Active	0007.b400.0101	local	-
Fa0/1	1	2	-	Listen	0007.b400.0102	10.1.2.3	-


```
BR-W2#
interface FastEthernet0/1
ip address 10.1.2.3 255.255.255.0
glbp 1 priority 105
glbp 1 preempt
glbp 1 ip 10.1.2.1
glbp 1 load-balancing round-robin
```

BR-W2# show glbp brief

Interface	Grp	Fwd	Pri	State	Address	Active Router	Standby Router
Fa0/1	1	-	105	Standby	10.1.2.1	10.1.2.2	local
Fa0/1	1	1	-	Listen	0007.b400.0101	10.1.2.2	-
Fa0/1	1	2	-	Active	0007.b400.0102	local	-

Gateway Load Balancing Protocol (GLBP) IPv6

AVG = Active Virtual Gateway
 SVG = Standby Virtual Gateway
 AVF = Active Virtual Forwarder

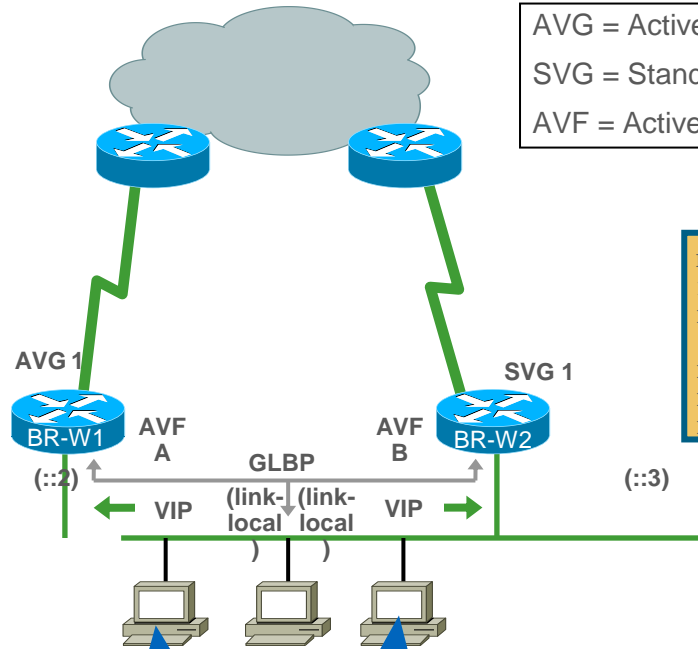

Default Gateway:
 Learned via RA
 DG MAC: MAC AVF
 1.1

Default Gateway:
 Learned via RA
 DG MAC: MAC AVF
 1.2

```
BR-W1#
interface FastEthernet0/1
ipv6 address 2001:DB8:C15:C002::2/64
glbp 2 priority 110
glbp 2 preempt
glbp 2 ipv6 autoconfig
glbp 2 load-balancing round-robin
```

```
BR-W1# show glbp brief
Interface Grp Fwd Pri State Address Active Router Standby Router
Fa0/1 2 - 110 Active FE80::7:B4FF:FE00:200 local FE80::A8BB:CCF
F:FE00:600
Fa0/1 2 1 - Listen 0007.b400.0201 FE80::A8BB:CCFF:FE00:600
Fa0/1 2 2 - Active 0007.b400.0202 local
```

```
BR-W2#
interface FastEthernet0/1
ipv6 address 2001:DB8:C15:C002::3/64
glbp 2 priority 105
glbp 2 preempt
glbp 2 ipv6 autoconfig
glbp 2 load-balancing round-robin
```

```
BR-W2# show glbp brief
Interface Grp Fwd Pri State Address Active Router Standby Router
Fa0/1 2 - 105 Standby FE80::7:B4FF:FE00:200 FE80::A8BB:CCFF:FE00:500 local
Fa0/1 2 1 - Active 0007.b400.0201 local
Fa0/1 2 2 - Listen 0007.b400.0202 FE80::A8BB:CCFF:FE00:500
```

Configuration of static link-local address is supported


Gateway Load Balancing Protocol (GLBP)

AVG = Active Virtual Gateway
 SVG = Standby Virtual Gateway
 AVF = Active Virtual Forwarder


```
BR-W2#
*Mar 31 17:04:27: %GLBP-6-STATECHANGE: FastEth0/1 Grp 1 state Standby -> Active
*Mar 31 17:04:27: %GLBP-6-FWDSTATECHANGE: FastEth0/1 Grp 1 Fwd 1 state Listen -> Active
```

```
BR-W2# show glbp brief
```


Interface	Grp	Fwd	Pri	State	Address	Active Rtr	Standby Rtr
Fa0/1	1	-	105	Active	10.1.2.1	local	unknown
Fa0/1	1	1	-	Active	0007.b400.0101	local	-
Fa0/1	1	2	-	Active	0007.b400.0102	local	-

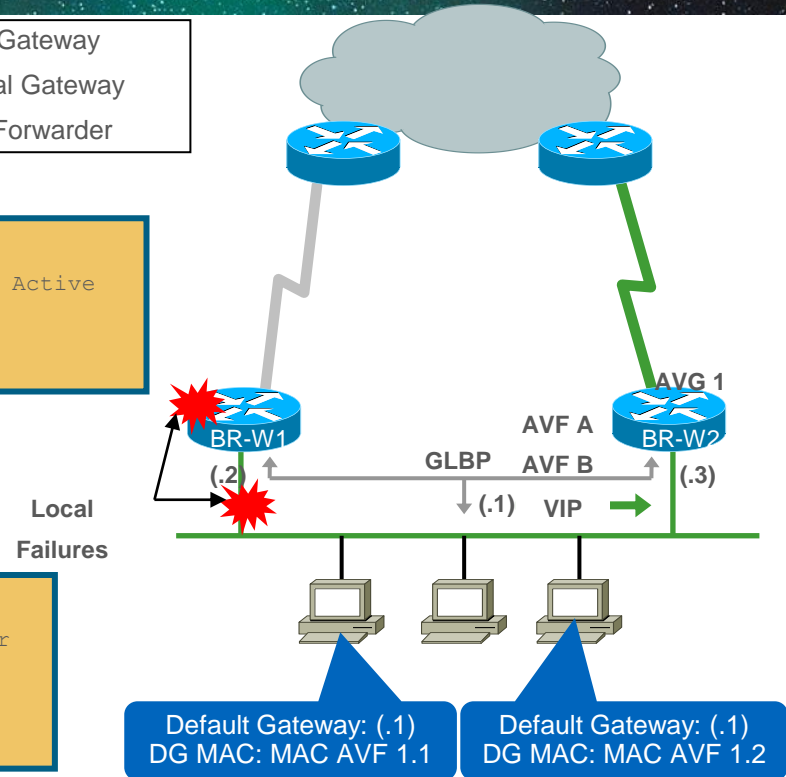

GLBP with Enhanced Object Tracking

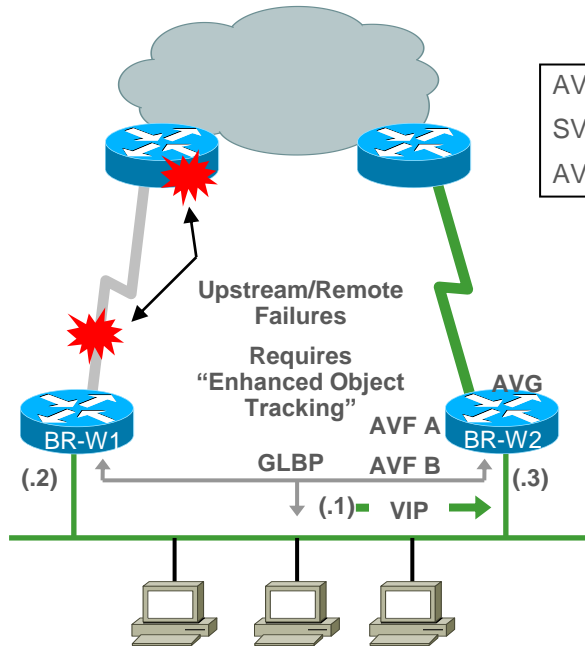

AVG = Active Virtual Gateway
SVG = Standby Virtual Gateway
AVF = Active Virtual Forwarder

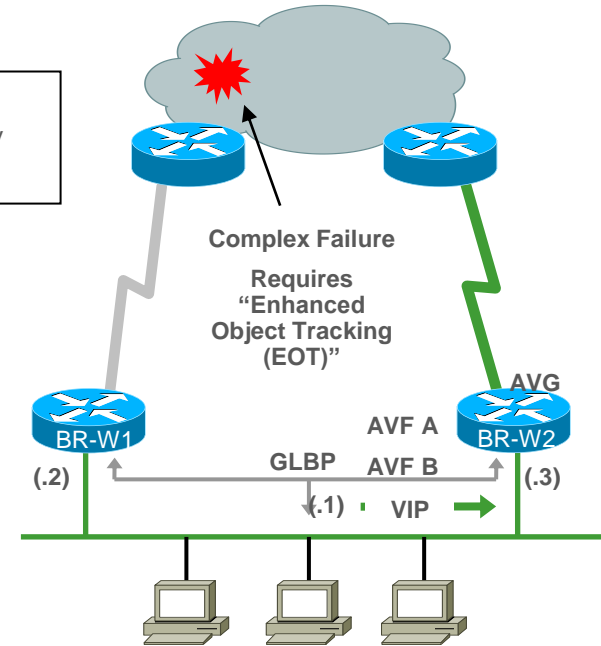

Branch

Enhanced Object Tracking

Track Options	Syntax
Line-Protocol State of Interface	<pre>track object-number interface type number line-protocol track 1 interface serial 1/1 line-protocol</pre>
IP-Routing State of Interface	<pre>track object-number interface type number ip routing track 2 interface ethernet 1/0 ip routing</pre>
IP-Route Reachability	<pre>track object-number ip route IP-Addr/Prefix-len reachability track 3 ip route 10.16.0.0/16 reachability</pre>
Threshold* of IP-Route Metrics	<pre>track object-number ip route IP-Addr/Prefix-len metric threshold track 4 ip route 10.16.0.0/16 metric threshold</pre>

15.3(3)S
15.4(1)T
add support
for IPv6

```
Router# show track 100
Track 100
Interface Serial1/1 line-protocol
Line protocol is Up
1 change, last change 00:00:05
Tracked by:
GLBP FastEthernet0/1 1
```

```
Router# show track 103
Track 103
IP route 10.16.0.0 255.255.0.0 reachability
Reachability is Up (EIGRP)
1 change, last change 00:02:04
First-hop interface is Ethernet0/1
Tracked by:
GLBP FastEthernet0/1 1
```

* EIGRP, OSPF, BGP, Static Thresholds Are Scaled to Range of (0 – 255)

Enhanced Object Tracking – IP SLA

Track Options	Syntax
IP SLAs Operation	<pre>track object-number ip sla type number state track 5 ip sla 4 state</pre>
Reachability of an IP SLAs Host	<pre>track object-number ip sla type number reachability track 6 ip sla 4 reachability</pre>

Types of IP SLA Probes:

dhcp	http	path-jitter
dns	icmp-echo ¹	tcp-connect ¹
ethernet	icmp-jitter	udp-echo ¹
frame-relay	mpls	udp-jitter ¹
ftp	path-echo	voip

¹Available for IPv6


IP SLA - UDP - Jitter Probe

```
ip sla operation-number
  type udp-jitter [hostname | ip-address] port-number [num-packets
number-of-packets] [interval inter-packet-interval]
  frequency seconds
  request-data-size bytes
```

UDP Jitter Operation Parameter	Default Value
Number of Packets (N)	10 Packets
Payload Size per Packet (S)	32 Bytes
Time Between Packets, in Milliseconds (T)	20 ms
Elapsed Time Before the Operation Repeats, in Seconds (F)	60 Seconds

Enhanced Object Tracking (EOT)

Tracking IP SLA

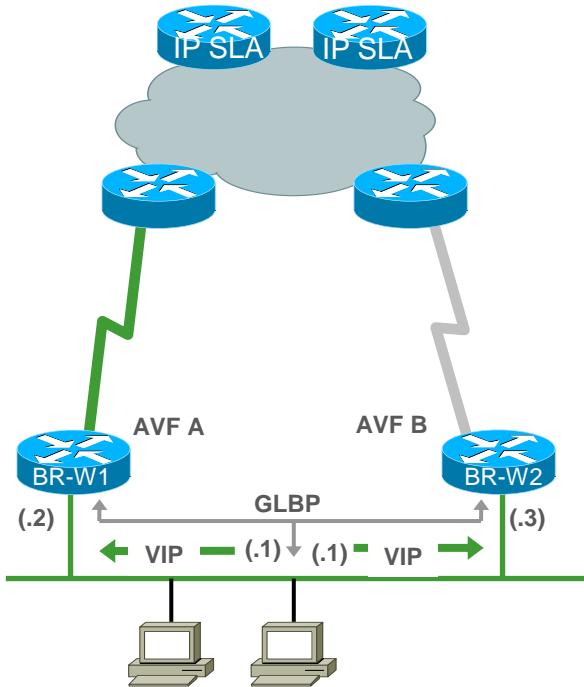

```
BR-W1#
```

```
ip sla 100
 icmp-echo 10.100.100.100 source-ip 10.1.2.2
 timeout 100
 frequency 10
 ip sla schedule 100 life forever start-time now
 !
ip sla 200
 icmp-echo 10.100.200.100 source-ip 10.1.2.2
 timeout 100
 frequency 10
 ip sla schedule 200 life forever start-time now
 ip route 10.100.100.100 255.255.255.255 192.168.101.9
 ip route 10.100.200.100 255.255.255.255 192.168.101.9
```


```
BR-W1# show ip sla statistics
```

```
IPSLA operation id: 100
   Latest RTT: 1 milliseconds
Latest operation start time: *04:42:11.444 UTC Tue Feb 17 2009
Latest operation return code: OK
Number of successes: 46
Number of failures: 0
Operation time to live: Forever

IPSLA operation id: 200
   Latest RTT: 1 milliseconds
Latest operation start time: *04:42:11.356 UTC Tue Feb 17 2009
Latest operation return code: OK
Number of successes: 24
Number of failures: 0
Operation time to live: Forever
```


Enhanced Object Tracking

Tracking IP SLA

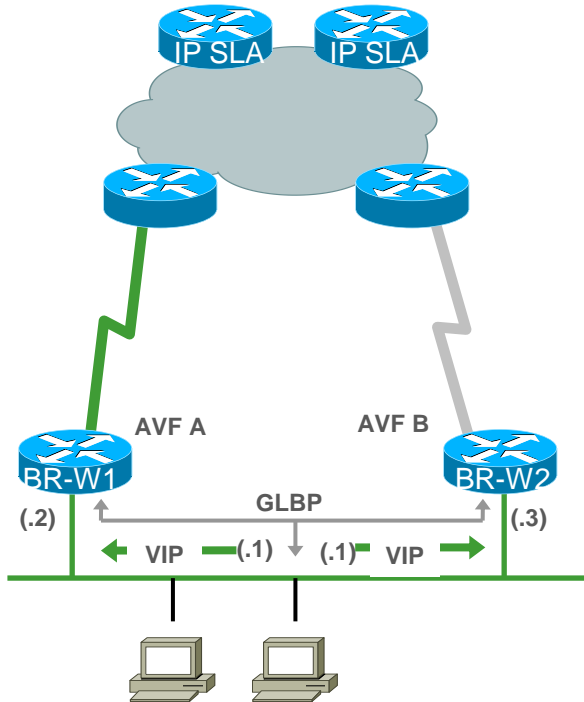

```
BR-W1#  
track 100 ip sla 100 reachability  
track 200 ip sla 200 reachability  
track 1 list boolean or  
  object 100  
  object 200  
interface FastEthernet0/1  
 ip address 10.1.2.2 255.255.255.0  
 glbp 1 ip 10.1.2.1  
 glbp 1 priority 110  
 glbp 1 preempt  
 glbp 1 weighting 120 lower 100  
 glbp 1 load-balancing weighted  
 glbp 1 weighting track 1 decrement 30
```

```
BR-W1# show glbp  
FastEthernet0/1 - Group 1  
  State is Active  
    1 state change, last state change 00:09:59  
  Virtual IP address is 10.1.2.1  
  Hello time 3 sec, hold time 10 sec  
    Next hello sent in 2.336 secs  
  Redirect time 600 sec, forwarder timeout 14400 sec  
  Preemption enabled, min delay 0 sec  
  Active is local  
  Standby is 10.1.2.3, priority 105 (expires in 7.808 sec)  
  Priority 110 (configured)  
  Weighting 120 (configured 120), thresholds: lower 100, upper 120  
  Track object 1 state Up decrement 30  
  Load balancing: weighted  
  Group Members:  
    aabb.cc00.0110 (10.1.2.2) local  
    aabb.cc00.0410 (10.1.2.3)  
  There are 2 forwarders (1 active)  
  Forwarder 1  
    State is Active  
    <SNIP>  
  Forwarder 2  
    State is Listen  
    <SNIP>
```

Enhanced Object Tracking


Composite Failure

```
BR-W1#
*Feb 17 05:17:25: %TRACKING-5-STATE: 100 ip sla 100 state Up->Down
*Feb 17 05:17:25: %TRACKING-5-STATE: 200 ip sla 200 state Up->Down
*Feb 17 05:17:26: %TRACKING-5-STATE: 1 list boolean or Up->Down
*Feb 17 05:17:38: %GLBP-6-FWDSTATECHANGE: FastEth0/1 Grp 1 Fwd 1
state Active -> Listen
```

BR-W1 Remains
Active Virtual
Gateway (AVG)

```
BR-W2#show glbp
FastEthernet0/1 - Group 1
State is Standby
1 state change, last state change 00:28:16
Virtual IP address is 10.1.2.1
Hello time 3 sec, hold time 10 sec
Next hello sent in 1.856 secs
Redirect time 600 sec, forwarder timeout 14400 sec
Preemption enabled, min delay 0 sec
Active is 10.1.2.2, priority 110 (expires in 10.400 sec)
Standby is local
Priority 105 (configured)
Weighting 120 (configured 120), thresholds: lower 100, upper 120
Track object 1 state Up decrement 30
Load balancing: weighted
Group members:
 aabb.cc00.0110 (10.1.2.2)
 aabb.cc00.0410 (10.1.2.3) local
There are 2 forwarders (2 active)
Forwarder 1
State is Active
<SNIP>
Forwarder 2
State is Active
<SNIP>
```

BR-W2 Becomes
Active Virtual
Forwarder (AVF)
for both A and B

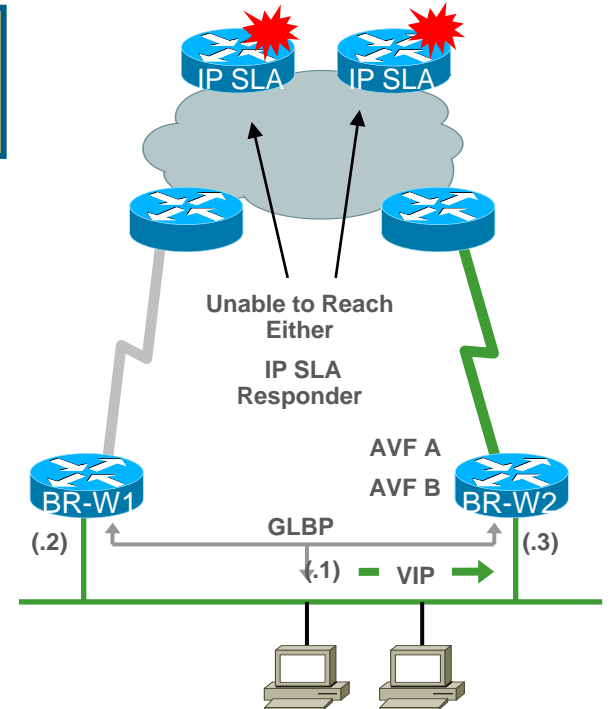

Agenda

- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
 - First Hop Redundancy Protocols
 - Routing Protocols
 - DDR and Static Routing
 - Performance Routing
- Design and Deployment
- Final Wrap Up

Routing Protocol Timers


INFORMATIONAL

	Keepalive (B) Hello (E,I,O) Update (R)	Invalid (R)	Holdtime (B,E,I) Dead (O) Holddown (R)	Flush (R)
BGP	60		180	
EIGRP (< T1)	5 (60)		15 (180)	
IS-IS (DIS)	10 (3.333)		30 (10)	
OSPF (NBMA)	10 (30)		40 (120)	
RIP/RIPv2	30	180	180	240

Note: Cisco Default Values

Routing Protocol Neighbour Behaviour

INFORMATIONAL

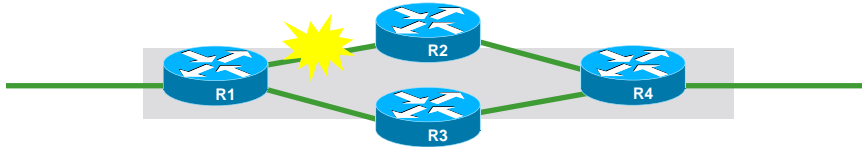

Recovery Times by Protocol

	Link Down Line Protocol Down	Link Up Loss 100%	Link Up Neighbour Down	Link Up Loss ~5%
BGP	~ 1 s	180	180	Never
EIGRP ($< T1$)	~ 1s	15 (180)	15 (180)	Never
IS-IS (DIS)	~ 1s	30 (10)	30 (10)	Never
OSPF (NBMA)	~ 1s	40 (120)	40 (120)	Never
RIP/RIPv2	~ 1s	240	240	Never

Note: Using Cisco Default Values

BRKRST-2042


© 2014 Cisco and/or its affiliates. All rights reserved.

Cisco Public

Cisco *live!*

Routing Protocol Neighbour Behaviour

Adjust Hello Timers

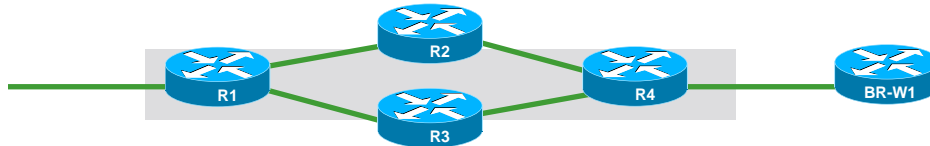

```
R4# show ip bgp vpv4 vrf cisco neighbor
BGP neighbor is 192.168.101.10, vrf cisco, remote AS 65110, external link
BGP version 4, remote router ID 192.168.201.10
BGP state = Established, up for 1d10h
Last read 00:00:19, hold time is 180, keepalive interval is 60 seconds
```

```
R4# show ip bgp vpv4 vrf cisco neighbor
BGP neighbor is 192.168.101.10, vrf cisco, remote AS 65110, external link
BGP version 4, remote router ID 192.168.201.10
BGP state = Established, up for 00:01:23
Last read 00:00:03, hold time is 21, keepalive interval is 7 seconds
```

```
BR-W1#
router bgp 65110
neighbor 192.168.101.9 timers 7 21
```

When Configuring the *Holdtime* Argument for a Value of Less than Twenty Seconds, the Following Warning Is Displayed:
% Warning: A Hold Time of Less than 20 Seconds Increases the Chances of Peer Flapping

Introducing BFD



Bi-Directional Forwarding Detection:

- Extremely lightweight hello protocol
 - IPv4, IPv6, MPLS, P2MP
- 10s of milliseconds (technically, microsecond resolution) forwarding plane failure detection mechanism.
- Single mechanism, common and standardised
 - Multiple modes: Async (echo/non-echo), Demand
- Independent of Routing Protocols
- Levels of security, to match conditions and needs
- Facilitates close alignment with hardware

Drivers for BFD

- Link-layer detection misses some types of outages
 - e.g. Control Plane failure
- Control Plane failure detection is very conservative
 - 15-40 seconds in default configurations
- Link-layer failure detection is not consistent across media types
 - Less than 50ms on APS- protected SONET
 - A few seconds on Ethernet
 - Several seconds or more on WAN links
- Provides a measure of consistency across routing protocols
- Most current failure detection mechanisms are an order of magnitude too long for time-sensitive applications

Routing Protocol Neighbour Behaviour


Bi-Directional Forwarding Detection

```
R1#
router eigrp 65110
 network 172.16.1.0 0.0.0.255
 bfd all-interfaces
 interface FastEthernet0/1
 ip address 172.16.1.1 255.255.255.0
 bfd interval 50 min_rx 50 multiplier 3
```

```
R1# show bfd neighbors detail
```

```
NeighAddr          LD/RD   RH/RS   State   Int
172.16.1.2         1/1    Up      Up      Fa0/1
Session state is UP and using echo function with 50 ms interval.
OurAddr: 172.16.1.1
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 1000000, MinRxInt: 1000000, Multiplier: 3
Received MinRxInt: 1000000, Received Multiplier: 3
Holddown (hits): 0(0), Hello (hits): 1000(311)
Rx Count: 290, Rx Interval (ms) min/max/avg: 1/1900/883 last: 328 ms ago
Tx Count: 312, Tx Interval (ms) min/max/avg: 1/1000/875 last: 244 ms ago
Elapsed time watermarks: -1 0 (last: 0)
Registered protocols: EIGRP
Uptime: 00:04:15
Last packet: Version: 1           - Diagnostic: 0
              State bit: Up       - Demand bit: 0
              Poll bit: 0         - Final bit: 0
              Multiplier: 3       - Length: 24
              My Discr.: 1        - Your Discr.: 1
              Min tx interval: 1000000 - Min rx interval: 1000000
              Min Echo interval: 50000
```

```
R1#
router bgp 65110
 neighbor 192.168.101.9 fall-over bfd
 interface FastEthernet0/0
 ip address 192.168.101.10
 255.255.255.248
 bfd interval 250 min_rx 250 multiplier 3
```

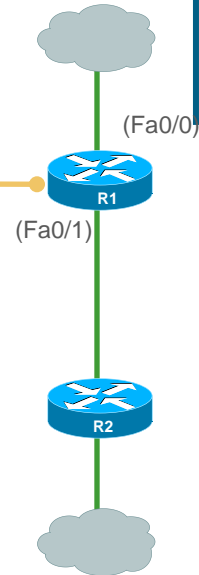

Configured in milliseconds (ms)
Displayed in microseconds (μ s)
But shown with ms instead of μ s

Routing Protocol Neighbour Behaviour

Detecting Unreachable Neighbour (Hello Timers vs. BFD)



100% Packet Loss
(Link Up)

EIGRP Default: Elapsed Time Between 10 – 15 Sec

```
R1# show clock
*19:43:37.646 UTC Mon Feb 16 2009

*Feb 16 19:43:48.974: %DUAL-5-NBRCHANGE: IP-EIGRP(0) 65110: Neighbor 10.1.2.220 (FastEthernet0/1) is
down: holding time expired
```

BFD: Elapsed Time Between 100 - 150 ms

```
*Feb 16 19:15:41.730: bfdVlFSM e:5, s:3bfdnfy-client a:10.1.2.220, e: 1
*Feb 16 19:15:41.730: Session [10.1.2.120,10.1.2.220,Fa0/1,1], event ECHO FAILURE, state UP -> DOWN
*Feb 16 19:15:41.730: BFD: bfd_neighbor - action:DESTROY, proc/sub:2048/65110, idb:FastEthernet0/1,
neighbor:10.1.2.220
*Feb 16 19:15:41.730: bfdVlFSM e:6, s:1
*Feb 16 19:15:41.730: Session [10.1.2.120,10.1.2.220,Fa0/1,1], event Session delete, state DOWN -> ADMIN
DOWN
*Feb 16 19:15:41.734: %DUAL-5-NBRCHANGE: IP-EIGRP(0) 65110: Neighbor 10.1.2.220 (FastEthernet0/1) is
down: BFD DOWN notification
*Feb 16 19:15:41.734: BFD: bfd_neighbor - action:DESTROY, proc/sub:2048/65110, idb:FastEthernet0/1,
neighbor:10.1.2.220
```

Agenda

- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
 - First Hop Redundancy Protocols
 - Routing Protocols
 - **DDR and Static Routing**
 - Performance Routing
- Design and Deployment
- Final Wrap Up

Other Convergence Techniques


- Options using Static Routing
 - Floating Static Routes
 - Reliable Static Routing (RSR) using Enhanced Object Tracking (EOT)
- Dial on Demand Routing (DDR)
 - Backup Interface
 - Dialer Watch
 - EEM Script
- For more information:
 - http://www.cisco.com/en/US/tech/tk801/tk133/technologies_tech_note09186a008009457d.shtml

Dialer Watch

- Advantages
 - Useful for a multiple router backup scenario
 - Independent of line protocol status, routing protocol or encapsulation type
 - Immediate action upon detecting the loss of the primary route. Not dependent on “interesting traffic”.
- Disadvantages
 - Somewhat more complex to configure than backup interfaces and floating static methods
 - Requires a routing protocol, and is dependent on routing protocol convergence times

Dialer Watch

Example: 3G Backup

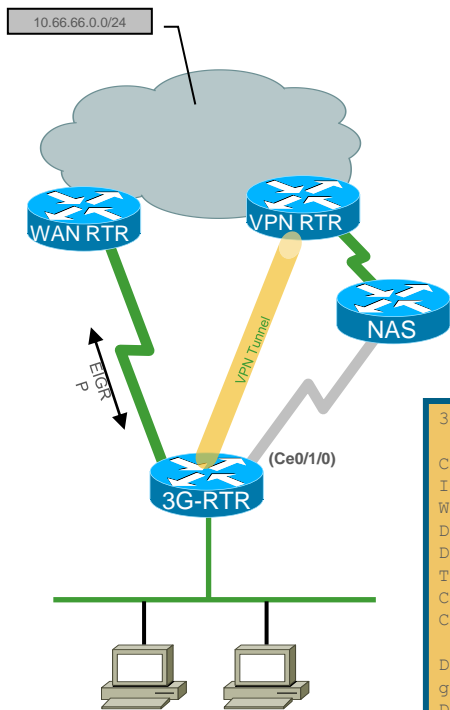

```
interface Cellular0/1/0
ip address negotiated
encapsulation ppp
dialer in-band
dialer idle-timeout 300
dialer string gsm
dialer watch-group 8
dialer-group 1
no peer default ip address
async mode interactive
no ppp lcp fast-start
ppp chap hostname USER@3G-PROVIDER.COM
ppp chap password 0 3G-PASSWD
!
dialer watch-list 8 ip 10.66.66.0 255.255.255.0
```

3G-RTR# show dialer

```
Ce0/1/0 - dialer type = IN-BAND ASYNC NO-PARITY
Idle timer (300 secs), Fast idle timer (20 secs)
Wait for carrier (30 secs), Re-enable (15 secs)
Dialer state is data link layer up
Dial reason: Dialing on watched route loss
Time until disconnect 291 secs
Current call connected 00:00:10
Connected to gsm
```

Dial String	Successes	Failures	Last DNIS	Last status
gsm	2	0	00:00:10	successful
Default				

Floating Static Routes

- Advantages
 - Independent of line protocol status
 - Independent of encapsulation type
 - Can backup multiple interfaces/networks on a router
- Disadvantages
 - Requires a routing protocol and is dependent upon the routing protocol convergence times
 - Typically only provides backup for a single router
 - Requires “interesting” traffic to trigger DDR and to reset idle timers

Static Routes

- The concepts of administrative distance and backup routes are used to create **floating static routes**
- Configuring a static route with a very high administrative distance ensures it won't be installed as long as there's a dynamically learned route installed in the RIB
- Static routes can also track an SLA object to enable automatic failover

```
ip route 10.1.1.0 255.255.255.0 <B> 250  
ipv6 route 2001:db8:c15:c0::/64 <B> 250
```

```
show ip route
```


```
....
```

```
D EX 10.1.1.0/24 via <C>
```

```
show ipv6 route
```

```
D EX 2001:DB8:C15:C0::/64
```

```
via <C>
```

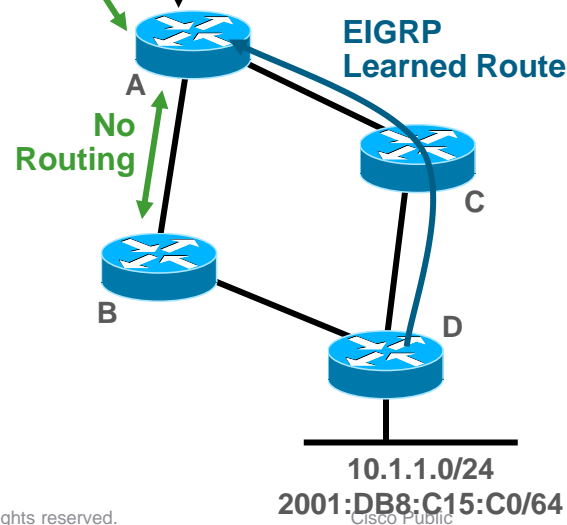

Static Routes

- When the dynamically learned route fails, the RIB calls the processes, looking for a backup route
- Since no other processes have routes to install, the static route with an administrative distance of 250 wins

```
ip route 10.1.1.0 255.255.255.0 <B> 250  
ipv6 route 2001:db8:c15:c0::/64 <B> 250
```

```
show ip route
```


```
....
```

```
S 10.1.1.0/24 via <B>
```

```
show ipv6 route
```


```
S 2001:DB8:C15:C0::/64
```

```
via <B>
```

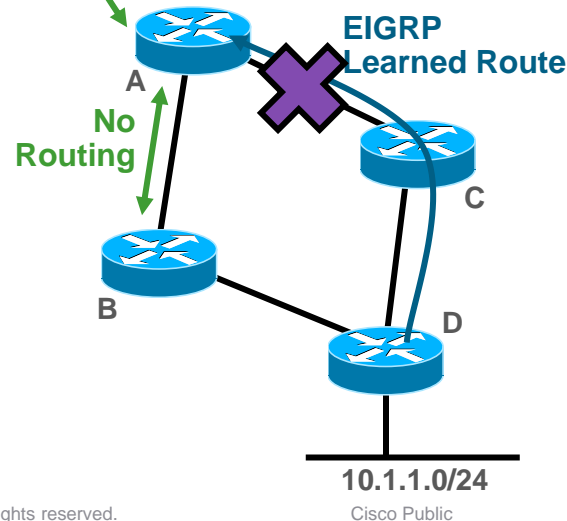

Reliable Static Routing

Tracking IP SLA

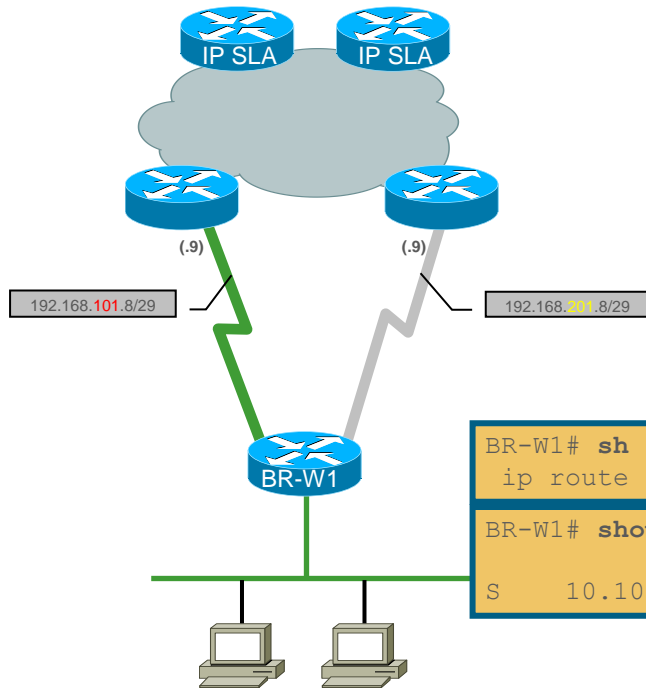

```
BR-W1#  
track 100 ip sla 100 reachability  
!  
ip sla 100  
  icmp-echo 10.100.100.100 source-ip 10.1.2.120  
  timeout 100  
  frequency 10  
ip sla schedule 100 life forever start-time now  
!  
ip route 10.100.100.100 255.255.255.255 192.168.101.9  
!  
ip route 10.100.0.0 255.255.0.0 192.168.101.9 track 100  
ip route 10.100.0.0 255.255.0.0 192.168.201.9 200
```

```
BR-W1# sh ip route track-table  
ip route 10.100.0.0 255.255.0.0 192.168.101.9 track 100 state is [up]
```

```
BR-W1# show ip route  
S    10.100.0.0/16 [1/0] via 192.168.101.9
```


Reliable Static Routing

Tracking IP SLA

```
BR-W1#  
*Mar 12 03:57:37.119: %TRACKING-5-STATE: 100 rtr 100 reachability Up->Down
```


```
BR-W1# show ip route track-table  
ip route 10.100.0.0 255.255.0.0 192.168.101.9 track 100 state is [down]
```

```
BR-W1# show ip route  
S 10.100.0.0/16 [200/0] via 192.168.201.9
```

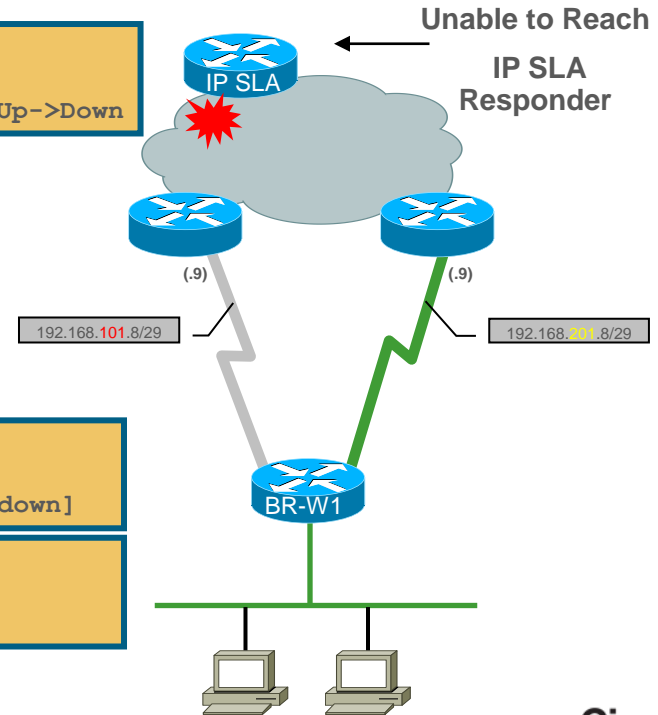

EEM Script

Example: IPv6 Static Route Event Tracking

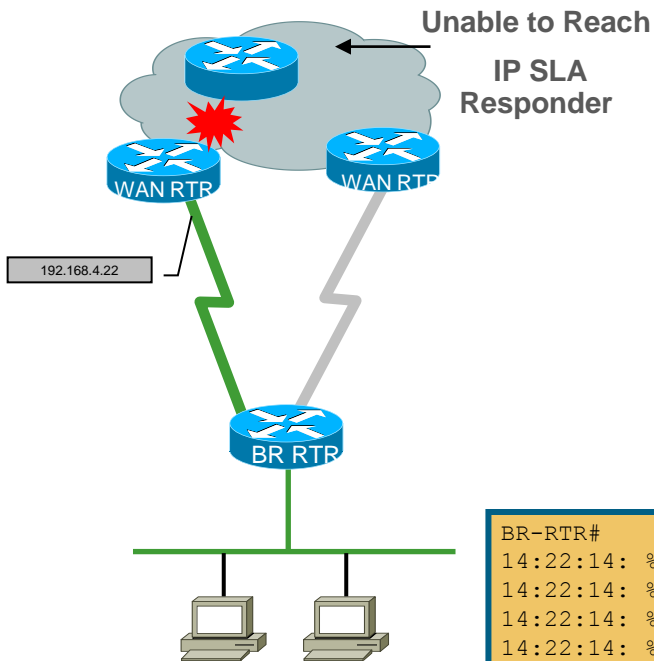

```
ipv6 route 2001:DB8::12/128 2001:DB8:B::5

ip sla 610
 icmp-echo 2001:DB8::12 source-interface GigabitEthernet0/1.99
 threshold 1000
 frequency 10
ip sla schedule 610 life forever start-time now

track 601 list threshold percentage
 <snip additional tracked objects>
 object 610
  threshold percentage down 40 up 60
track 610 ip sla 610


event manager applet DISABLE-STATIC-IPv6
 event track 601 state down
 action 1 cli command "enable"
 action 2 cli command "configure terminal"
 action 3 cli command "no ipv6 route ::/0 2001:DB8:B::5"
 action 4 cli command "end"
 action 99 syslog msg "DEFAULT IPv6 ROUTE DISABLED"
```

```
BR-RTR#
14:22:14: %TRACKING-5-STATE: 610 ip sla 610 state Up->Down
14:22:14: %TRACKING-5-STATE: 601 list threshold percentage Up->Down
14:22:14: %SYS-5-CONFIG_I: Configured from console by on vty0 (EEM:DISABLE-STATIC-IPv6)
14:22:14: %HA_EM-6-LOG: DISABLE-STATIC-IPv6: DEFAULT IPv6 ROUTE DISABLED
```

15.4(1)T added Enhanced Object Tracking

EEM Script

Example: 3G Backup with Event Tracking

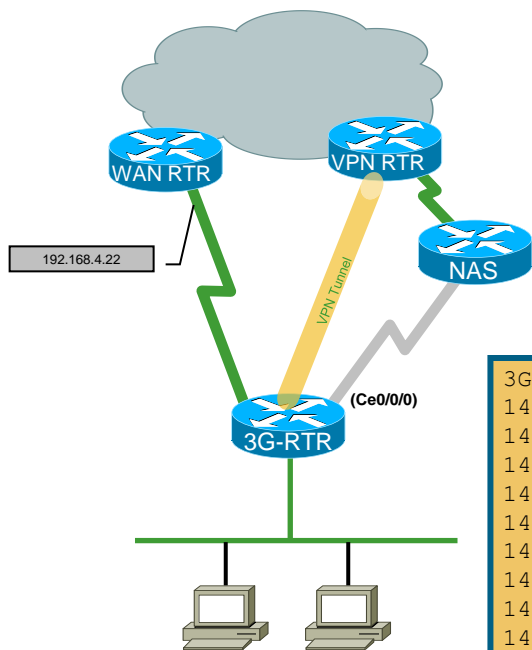

```
ip sla 100
 icmp-echo 192.168.4.22 source-interface GigabitEthernet0/1.99
 threshold 1000
 frequency 15
 ip sla schedule 100 life forever start-time now

track 60 ip sla 100 reachability


event manager applet ACTIVATE-3G
 event track 60 state down
 action 1 cli command "enable"
 action 2 cli command "configure terminal"
 action 3 cli command "interface cellular0/0/0"
 action 4 cli command "no shutdown"
 action 5 cli command "end"
 action 99 syslog msg "Activating 3G interface"
```

```
3G-RTR#
14:22:14: %TRACKING-5-STATE: 60 ip sla 100 reachability Up->Down
14:22:14: %SYS-5-CONFIG_I: Configured from console by on vty0 (EEM:ACTIVATE-3G)
14:22:14: %HA_EM-6-LOG: ACTIVATE-3G: Activating 3G interface
14:22:34: %LINK-3-UPDOWN: Interface Cellular0/0/0, changed state to up
14:22:34: %DIALER-6-BIND: Interface Ce0/0/0 bound to profile Di1
14:22:34: %LINEPROTO-5-UPDOWN: Line protocol on Interface Cellular0/0/0, changed state to up
14:22:40: %LINEPROTO-5-UPDOWN: Line protocol on Interface Tunnel11, changed state to up
14:22:40: %CRYPTO-6-ISAKMP_ON_OFF: ISAKMP is ON
14:22:42: %DUAL-5-NBRCHANGE: EIGRP-IPv4 201: Neighbor 10.4.36.1 (Tunnel11) is up: new adjacency
```

Agenda


- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
 - Routing Protocols
 - First Hop Redundancy Protocols
 - DDR and Static Routing
 - Performance Routing
- Design and Deployment
- Final Wrap Up

Enterprise WAN Challenge

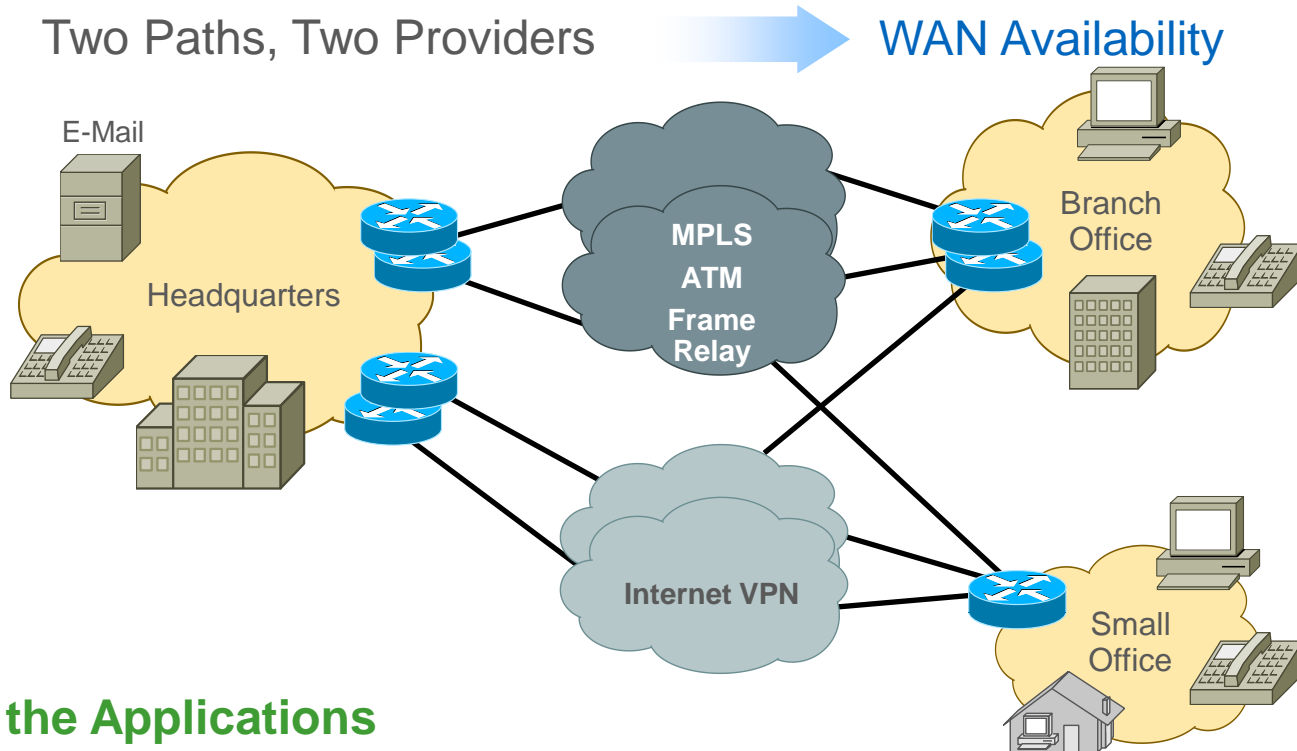


But, Are the Applications Performing Adequately?

Performance Routing (PfR)

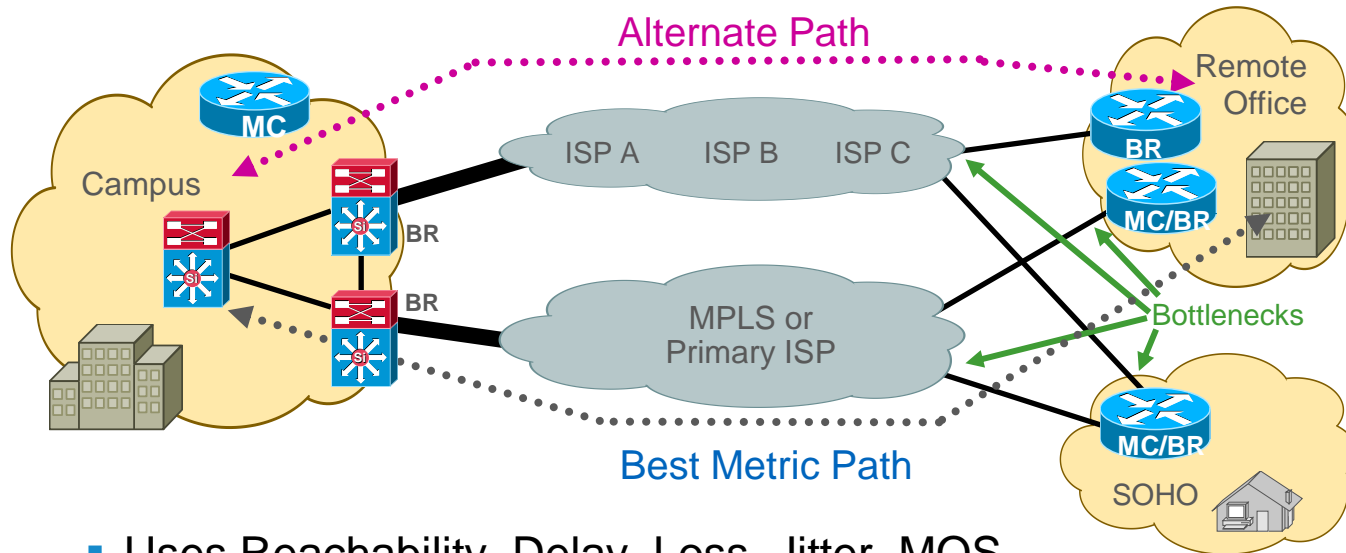

- Uses Reachability, Delay, Loss, Jitter, MOS, Load and \$Cost to determine the best path
- PfR Components
 - BR—Border Router (Forwarding Path)
 - MC—Master Controller (Decision Maker)


Traditional Topology

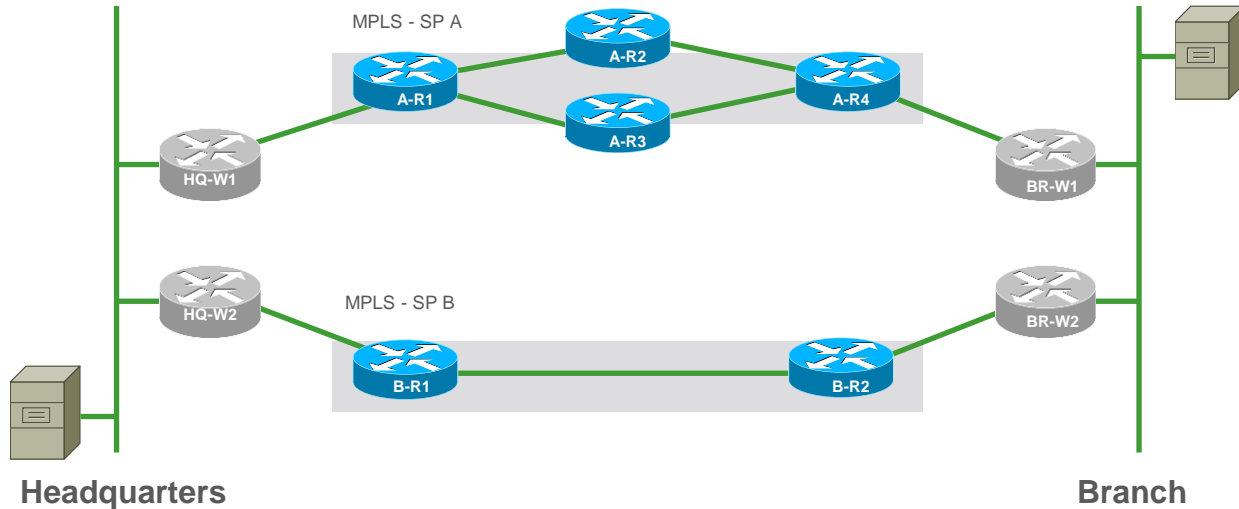

- Routing protocol selects path
- Blackhole reconvergence can take minutes
- Will not recover from brownouts


PfR Enabled Topology

L3—L7 Aware

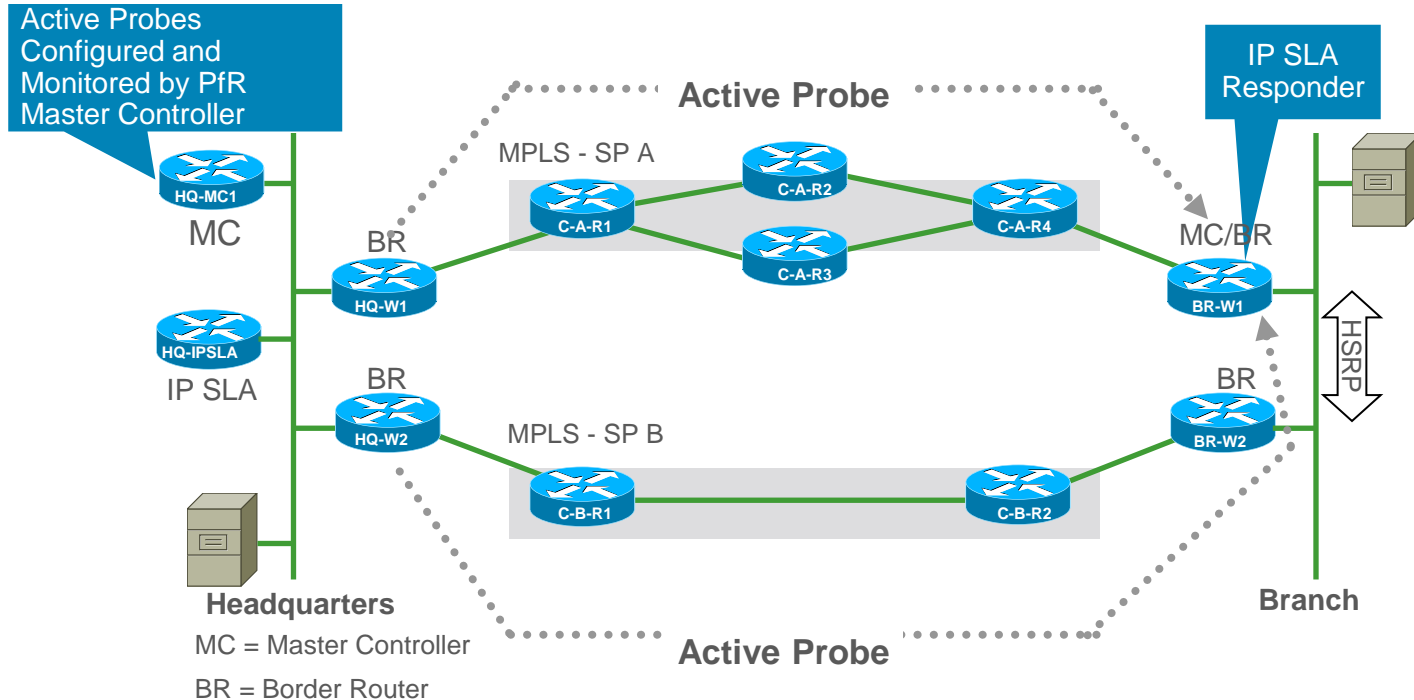

- PfR can override routing protocol to select path
- Active probes significantly improve reconvergence due to blackholes and brownouts

Summary of Convergence Techniques

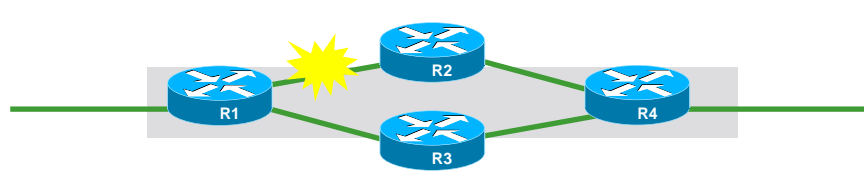

- Excellent Option
- SubOptimal Option
- Bad Option

Effectiveness of Various Techniques for Different Outage Types

	Link Down	Link Up Neighbour Down	Link Up Loss ~5%	Upstream Blackhole	Upstream Brownout
Routing Protocols	●	●	●	●	●
BFD	●	●	●	N/A ^{1,2}	N/A
EOT	●	●	●	●	●
EOT & RSR (w/IP SLA)	●	●	●	●	●
PfR	●	●	●	●	●

¹Support for Point-to-Point IPv4, IPv6, and GRE Tunnels – XE3.4

²BFD - BGP Multihop Client Support and cBit (IPv4/IPv6) – XE3.6


Agenda

- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
- Design and Deployment
 - Dual WAN
 - MPLS Dual Carrier
 - MPLS + Internet
- Final Wrap Up

WAN Edge


Connection Methods Compared

Core/Distribution

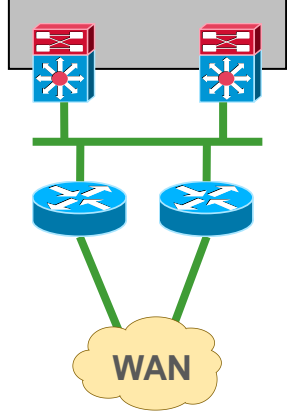


- All:
 - No static routes
 - No FHRPs

Core/Distribution

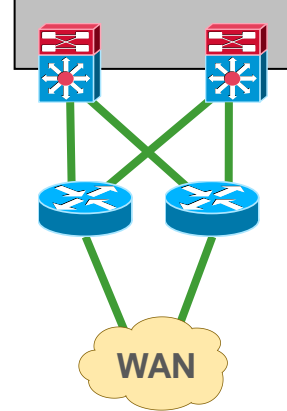


Recommended

Core/Distribution

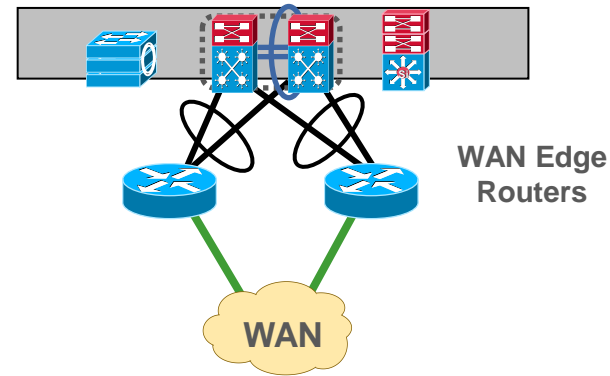


- Single Logical Control Plane
- Port-Channel for H/A

Dual Link Comparison

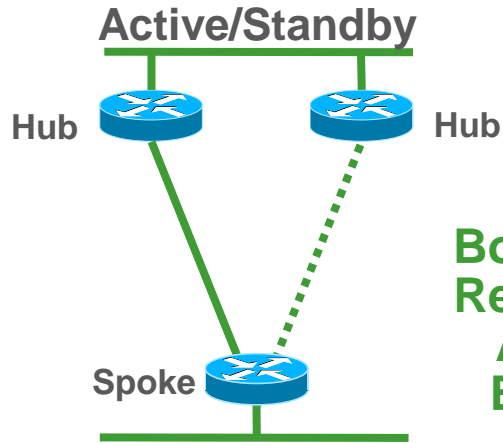

- Pros
 - Simple
 - Symmetric Routing
 - Dynamic re-route for most failure types
- Cons
 - Does not use all available BW


**Both Methods
Require Same
Aggregate
Bandwidth**

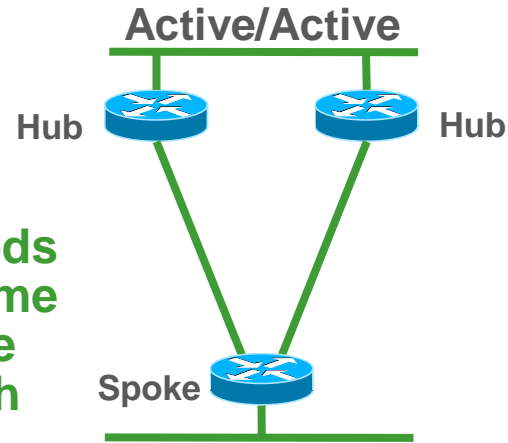

- Pros
 - More effective use of BW
 - Dynamic re-route for most failure types
- Cons
 - Asymmetric routing possible
 - More steps to analyse/troubleshoot

Hub Load Sharing


Hub to Branch Traffic

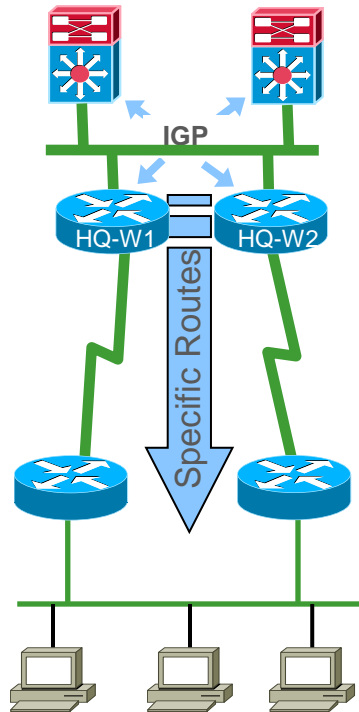


- Routing Protocols
 - EIGRP (supports unequal cost)
 - OSPF (equal cost only)
- Load Sharing
 - Default is per-session
 - Per-packet also supported (typically lower performance levels)
- Symmetric vs. Asymmetric routing

Branch Load Sharing with FHRPs


Branch to Hub Traffic

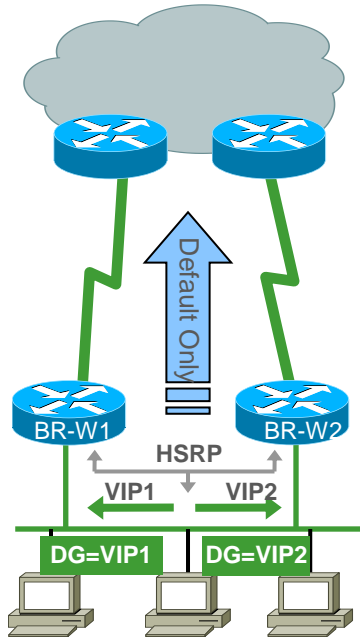

Multiple HSRP Groups

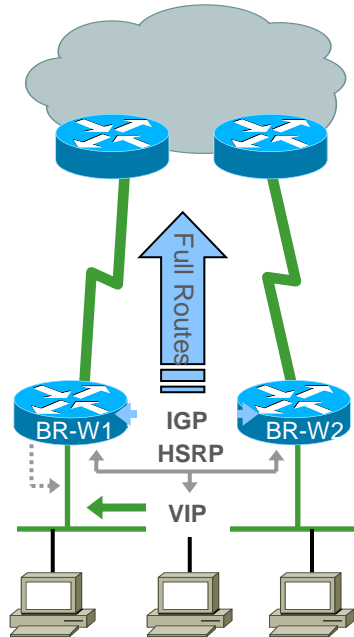

ICMP Redirect

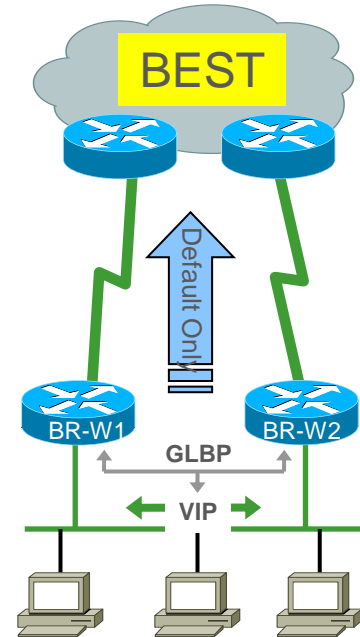

GLBP


Agenda

- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
- Design and Deployment
 - Dual WAN
 - MPLS Dual Carrier
 - MPLS + Internet
- Final Wrap Up

Dual WAN (MPLS—Dual Carrier)

PE-CE Protocol: BGP

- Default behaviour: 1-way load sharing
- Load is shared from HQ to Branch
- Only one link used Branch to HQ

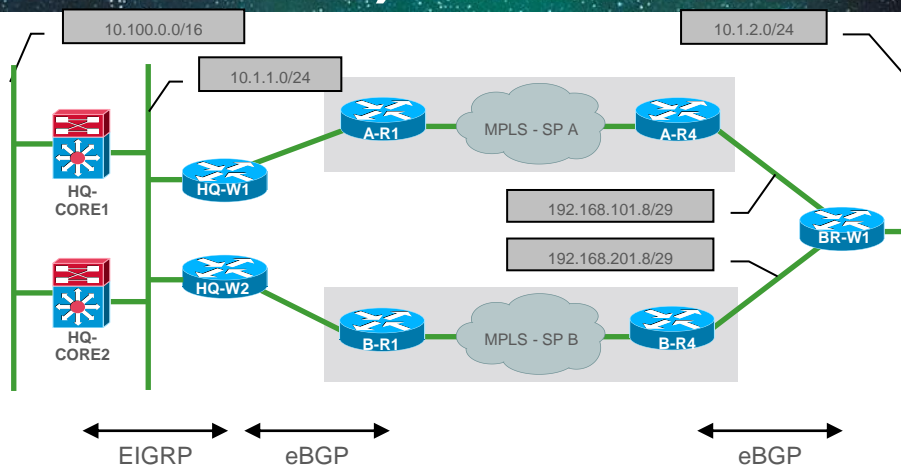

```
HQ-CORE1# show ip route
D EX 10.1.2.0/24 [170/258816] via 10.1.1.110, 02:24:22, Vlan10
      [170/258816] via 10.1.1.210, 02:24:22, Vlan10
```

```
BR-W1# show ip route
B 10.100.0.0/16 [20/0] via 192.168.101.9, 00:34:00
```

Dual WAN (MPLS—Dual Carrier)


PE-CE Protocol: BGP

■ EIGRP

- Routes redistributed from BGP into EIGRP (match & tag)
- BGP routes are treated as EIGRP external


■ BGP

- No iBGP required between HQ-W1 & HQ-W2 (CE routers)
- Routes redistributed from EIGRP into BGP except those tagged as originally sourced from BGP

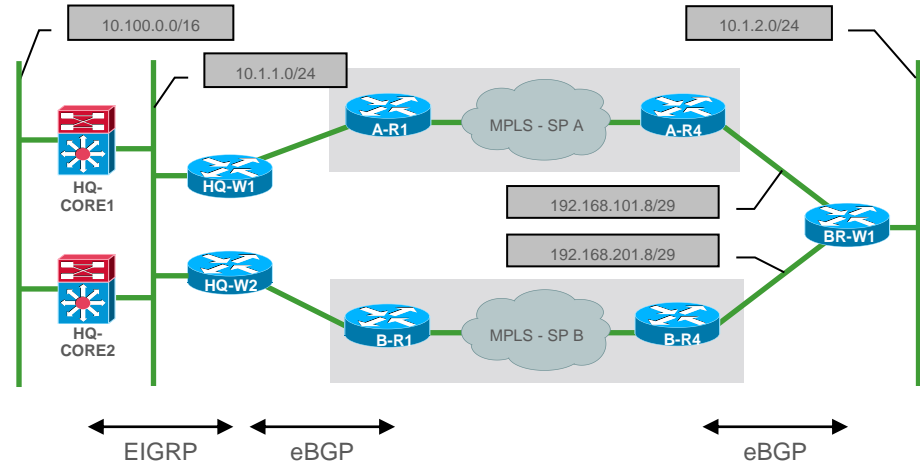

Dual WAN (MPLS—Dual Carrier)

Mutual Route Redistribution Detail

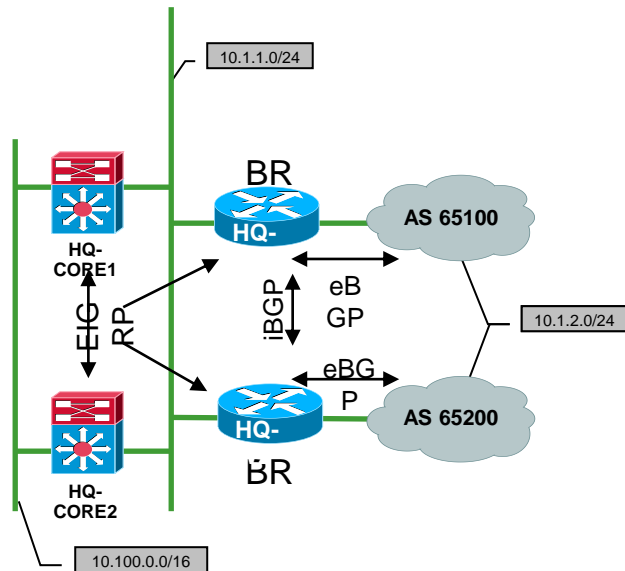

Routes into EIGRP

```
HQ-W1#
router eigrp networkers
 address-family ipv4 unicast autonomous-system 65110
 topology base
 redistribute bgp 65110 metric 45000 100 255 1 1500
 address-family ipv6 unicast autonomous-system 65110
 topology base
 redistribute bgp 65110 metric 45000 100 255 1 1500
```


Routes into BGP

```
HQ-W1#
router bgp 65110
 address-family ipv4
 redistribute eigrp 65110 route-map BLOCK-TAGGED-ROUTES
 address-family ipv6
 redistribute eigrp 65110 route-map BLOCK-TAGGED-ROUTES
 !
 route-map BLOCK-TAGGED-ROUTES deny 10
 match tag 65100 65200
 route-map BLOCK-TAGGED-ROUTES permit 20
 !
```

Dual WAN (MPLS—Dual Carrier)

PE-CE Protocol: BGP

- EIGRP
 - No EIGRP required on BR-W1 (collapsed routing)
- BGP
 - Protect Branch from becoming transit AS

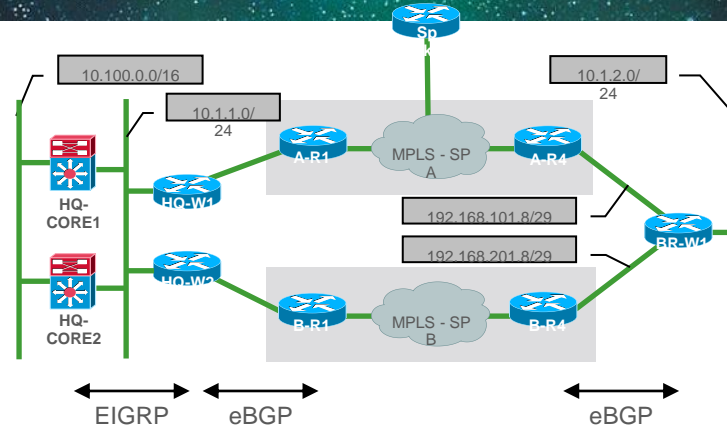


```
BR-W1# show ip bgp
Network          Next Hop          Metric LocPrf Weight Path
* 10.100.0.0/16  192.168.201.9    0 65200 65200 ?
*>                192.168.101.9    0 65100 65100 ?
```

```
BR-W1#
router bgp 65110
 neighbor 192.168.101.9 route-map NO-TRANSIT-AS out
 neighbor 192.168.201.9 route-map NO-TRANSIT-AS out
...
ip as-path access-list 1 permit ^$
route-map NO-TRANSIT-AS permit 10
 match as-path 1
```

Dual WAN (MPLS—Dual Carrier)

PE-CE Protocol: BGP

- Is it possible to load share from Branch to HQ?
- BGP Multipath
 - Allows installation of multiple BGP paths to same destination
 - Requirements (all must be equal)
 - Neighbour AS or AS-PATH
 - Weight
 - Local Pref
 - AS-PATH length
 - Origin
 - Med

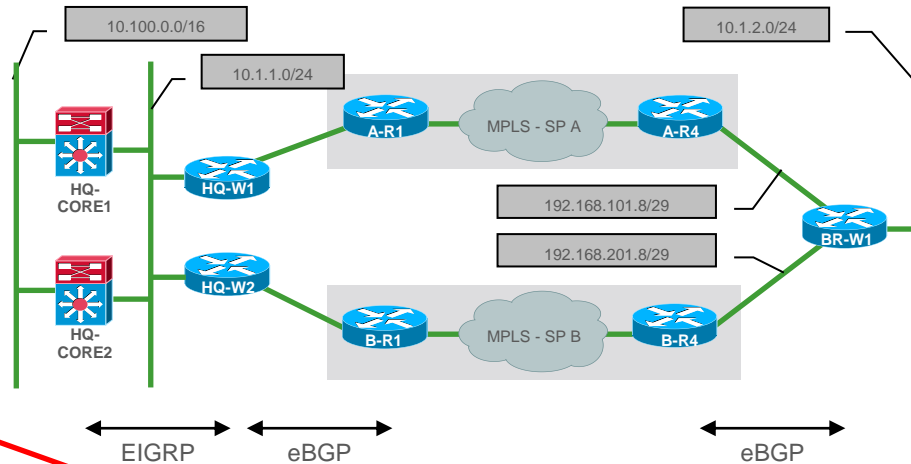

```
BR-W1# show ip bgp
```

	Network	Next Hop	Metric	LocPrf	Weight	Path
*	10.100.0.0/16	192.168.201.9	0	65200	65200	?
*>		192.168.101.9	0	65100	65100	?


```
BR-W1# show ip route
```

```
B 10.100.0.0/16 [20/0] via 192.168.101.9, 00:34:00
```

Dual WAN (MPLS—Dual Carrier)

PE-CE Protocol: BGP

- Is it possible to load share from Branch to HQ?
 - maximum-paths 2
- Requires hidden command:
 - **bgp bestpath as-path multipath-relax**

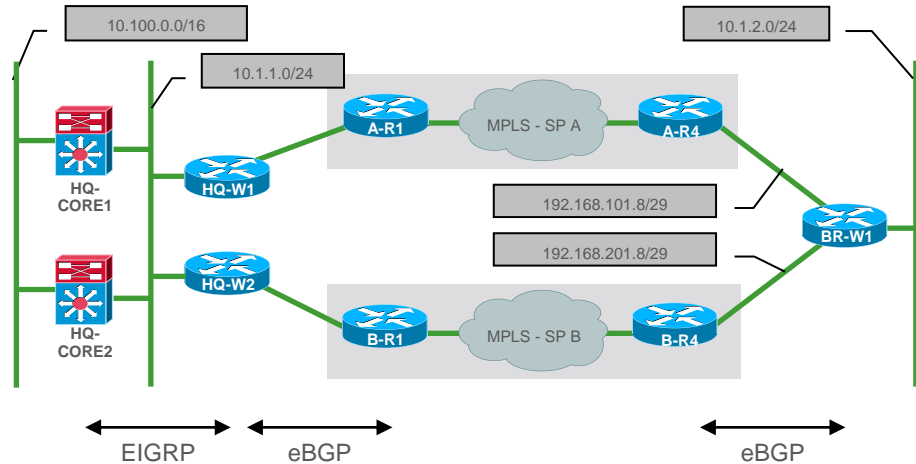


```
BR-W1#  
router bgp 65110  
  bgp bestpath as-path multipath-relax  
  address-family ipv4  
    maximum-paths 2  
  address-family ipv6  
    maximum-paths 2
```

```
BR-W1# show ip route  
B    10.100.0.0/16 [20/0] via 192.168.201.9, 00:03:44  
      [20/0] via 192.168.101.9, 00:03:44
```

Dual WAN (MPLS—Dual Carrier)

PE-CE Protocol: EIGRP

- Default behaviour: 2-way load sharing
 - Load is shared from HQ to Branch
 - Load is shared from Branch to HQ

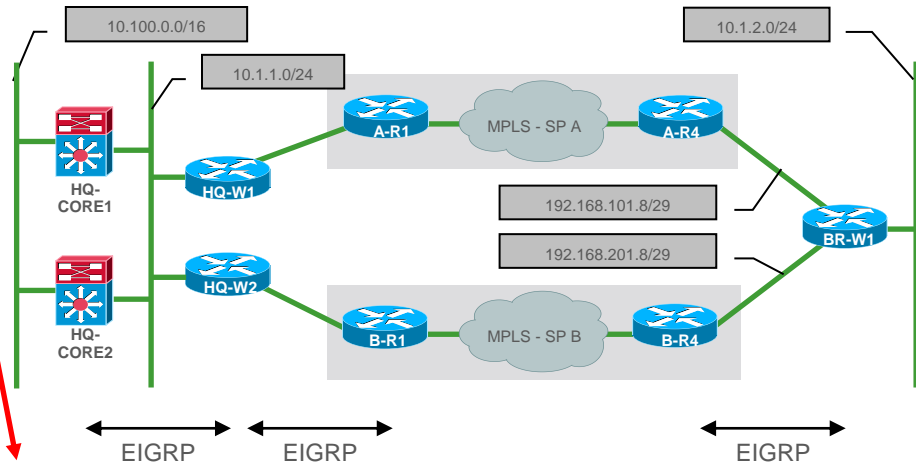


```
HQ-CORE1# show ip route
D    10.1.2.0/24 [90/33536] via 10.1.1.110, 00:15:29, Vlan10
                        [90/33536] via 10.1.1.210, 00:15:29, Vlan10
```

```
BR-W1# show ip route
D    10.100.0.0/16 [90/161280] via 192.168.201.9, 00:00:12, FastEthernet0/0.220
                        [90/161280] via 192.168.101.9, 00:00:12, FastEthernet0/0.120
```


Dual WAN (MPLS—Dual Carrier)

PE-CE Protocol: EIGRP

- EIGRP
 - No route redistribution required on CE routers
 - Protect Branch from becoming transit network
- BGP
 - PE routers handle mutual route redistribution

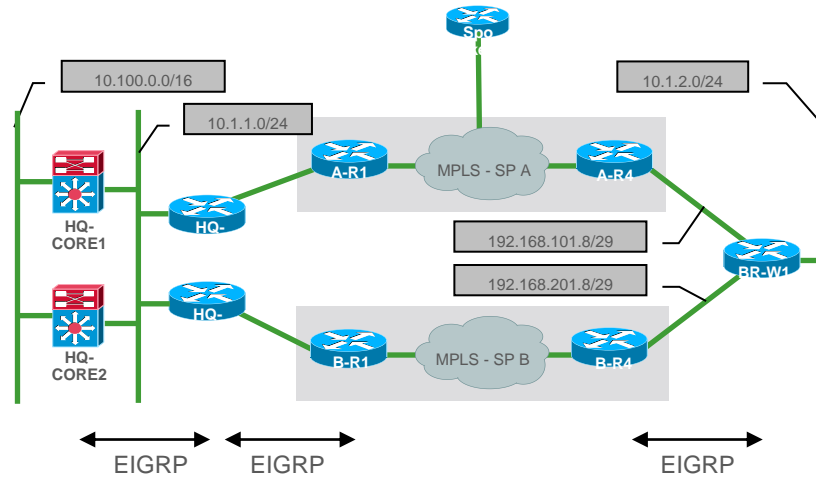


```
BR-W1#  
router eigrp 65110  
  eigrp stub connected
```

If Using Summaries (Optional):

```
BR-W1#  
router eigrp 65110  
  eigrp stub connected summary
```

Performance Routing (PfR)

Basic Configuration—Dedicated MC, BRs

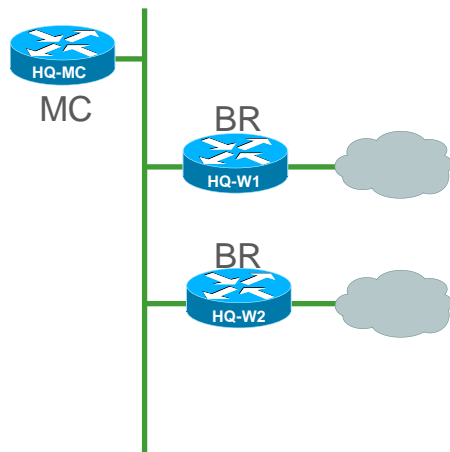

Headquarters

MC = Master Controller

BR = Border Router

PfR = Performance Routing

OER = Optimised Edge Routing

HQ-MC#

```
key chain PFR-KEYCHAIN
  key 1
    key-string cisco123
  !
pfr master
  !
border 10.1.1.110 key-chain PFR-KEYCHAIN
interface GigabitEthernet0/0 internal
interface GigabitEthernet0/1 external
  !
border 10.1.1.210 key-chain PFR-KEYCHAIN
interface GigabitEthernet0/0 internal
interface GigabitEthernet0/1 external
```


HQ-W1# (*and* HQ-W2)

```
key chain PFR-KEYCHAIN
  key 1
    key-string cisco123
  !
pfr border
  local GigabitEthernet0/0
  master 10.1.1.10 key-chain PFR-KEYCHAIN
```

pfr Keyword in Examples. **oer** Prior to IOS 15.1 Versions.

Performance Routing

iBGP Configuration—Multiple BRs

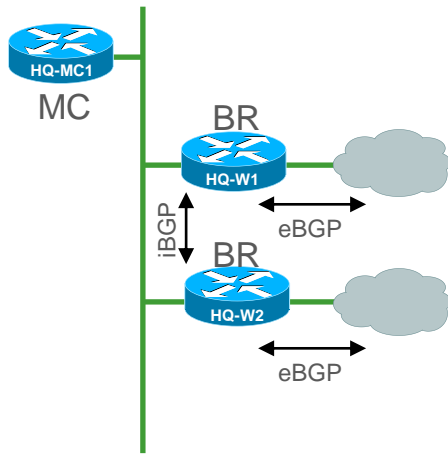

Headquarters

MC = Master Controller

BR = Border Router

```
HQ-W1#
router bgp 65110
 neighbor 10.1.1.210 remote-as 65110
 neighbor 10.1.1.210 next-hop-self
 neighbor 10.1.1.210 send-community
```

```
HQ-W1# show ip bgp
 Network      Next Hop      Metric LocPrf Weight Path
 * i10.1.2.0/24 10.1.1.210      0  100   0 65200 65200 i
 *>
                192.168.101.2
                0 65100 65100 i
```

```
HQ-W2#
router bgp 65110
 neighbor 10.1.1.110 remote-as 65110
 neighbor 10.1.1.110 next-hop-self
 neighbor 10.1.1.110 send-community
```


```
HQ-W2# show ip bgp
 Network      Next Hop      Metric LocPrf Weight Path
 * i10.1.2.0/24 10.1.1.110      0  100   0 65100 65100 i
 *>
                192.168.201.2
                0 65200 65200 i
```

Performance Routing

Basic Configuration—Combined MC and BR

```
BR-W1#
key chain PFR-KEYCHAIN
  key 1
    key-string cisco123
pfr master
  border 10.1.2.120 key-chain PFR-KEYCHAIN
  interface FastEthernet0/1 internal
  interface FastEthernet0/0.120 external
  interface FastEthernet0/0.220 external
pfr border
  local FastEthernet0/1
  master 10.1.2.120 key-chain PFR-KEYCHAIN
  active-probe address source interface FastEthernet0/1
  interface FastEthernet0/0
    load-interval 30
  interface FastEthernet0/0.120
    bandwidth 4000
  interface FastEthernet0/0.220
    bandwidth 4000
```

- Load-interval affects moving average calculations
- Bandwidth affects utilisation calculations

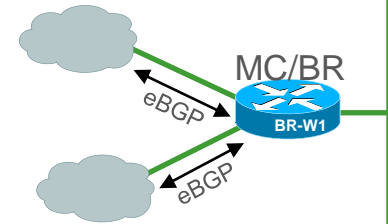

Branch

MC = Master Controller
BR = Border Router

```
BR-W1# show ip bgp
```

Network	Next Hop	Metric	LocPrf	Weight	Path
*> 10.100.100.0/24	192.168.101.9	0	65100	65100	?
*	192.168.201.9	0	65200	65200	?
*> 10.100.200.0/24	192.168.101.9	0	65100	65100	?
*	192.168.201.9	0	65200	65200	?

```
BR-W1# show ip route
```

```
B 10.100.100.0 [20/0] via 192.168.101.9, 03:32:30
B 10.100.200.0 [20/0] via 192.168.101.9, 03:32:30
```


Performance Routing

Load Sharing Configuration—Link Utilisation

If Traffic Goes Above the **max-xmit-utilisation** Threshold, PfR Tries to Move the Traffic from this Exit Link to Another Underutilised Exit Link

```
BR-W1#
pfr master
 interface FastEthernet0/0.120 external
   max-xmit-utilization percentage 50
 interface FastEthernet0/0.220 external
   max-xmit-utilization percentage 50
!
learn
 throughput
 periodic-interval 1
 monitor-period 1
 mode route observe
 mode select-exit best
 resolve utilization priority 1 variance 5
 no resolve delay
```

mode route control is now default

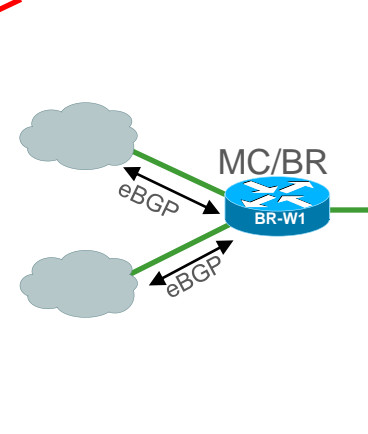

The **Variance** Keyword Configures the Allowable Percentage that an Exit Link Can Vary from the User-Defined Policy Value and Still Be Considered Equivalent


MC = Master Controller

BR = Border Router

Performance Routing

Load Sharing Example: PfR Enabled (Observe Only)

- Example Load
 - ~546 Kbps UDP Bi-Directional
 - 10.1.2.100 to 10.100.100.100
 - 10.1.2.100 to 10.100.200.201
- MPLS – SP B is not currently being utilised for Branch to HQ traffic

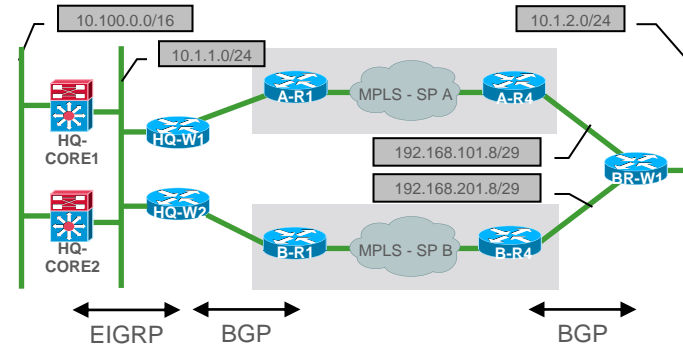

```
BR-W1# show pfr master border detail
Border                Status  UP/DOWN      AuthFail  Version
10.1.2.120            ACTIVE  UP           02:30:02    0    2.2
Fa0/1                 INTERNAL UP
Fa0/0.120             EXTERNAL UP
Fa0/0.220             EXTERNAL UP


External              Capacity  Max BW  BW Used  Load  Status  ExitId
Interface             (kbps)   (kbps)  (kbps)  (%)
-----
Fa0/0.120             Tx        4000    2000    1093   27    UP     2
                      Rx        4000    4000    547    13
Fa0/0.220             Tx        4000    2000    0      0    UP     1
                      Rx        4000    4000    546    13
```

Performance Routing

Load Sharing Example: PfR Enabled (Route Control)

```
BR-W1#  
pfr master  
mode route control
```

- Both MPLS carriers are now being utilised (in both directions)
- More prefixes and flows result in better load sharing

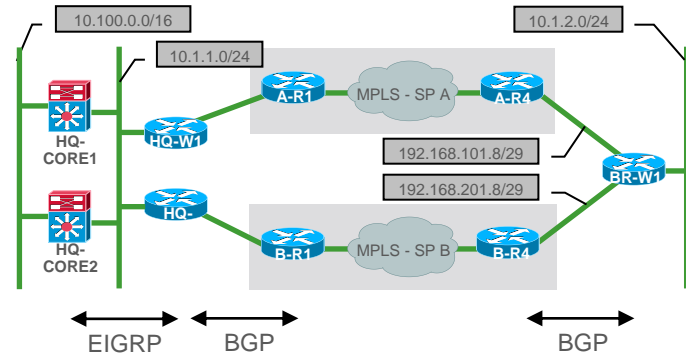


```
BR-W1# show pfr master border detail  
Border          Status  UP/DOWN      AuthFail  Version  
10.1.2.120      ACTIVE  UP           02:40:38  0        2.2  
Fa0/1           INTERNAL UP  
Fa0/0.120       EXTERNAL UP  
Fa0/0.220       EXTERNAL UP  
  
External        Capacity  Max BW  BW Used  Load  Status  ExitId  
Interface       (kbps)   (kbps)  (kbps)  (%)  
-----  
Fa0/0.120       Tx        4000    2000    547   13    UP      2  
                Rx        4000    4000    546   13  
Fa0/0.220       Tx        4000    2000    546   13    UP      1  
                Rx        4000    4000    548   13
```

Performance Routing

Load Sharing Example: PfR Enabled (Route Control)

- BGP route selection is influenced by PfR
- BGP change is also reflected with update to routing table

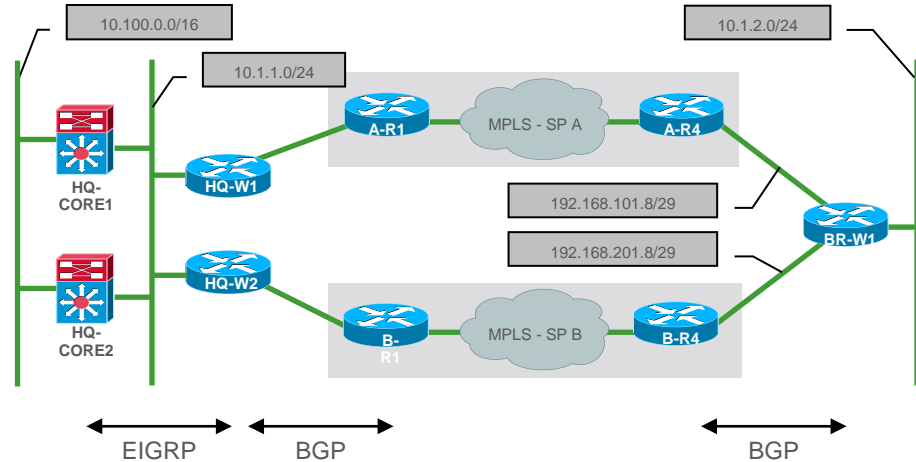

Unchanged by PfR

Changed by PfR

```
BR-W1# show ip bgp
Network          Next Hop          Metric LocPrf Weight Path
* > 10.100.100.0/24 192.168.101.9    0 65100 65100 ?
*                192.168.201.9    0 65200 65200 ?
* 10.100.200.0/24 192.168.101.9    0 65100 65100 ?
* >                192.168.201.9    0 65200 65200 ?
```


```
BR-W1# show ip route
B 10.100.100.0 [20/0] via 192.168.101.9, 03:38:43
B 10.100.200.0 [20/0] via 192.168.201.9, 03:45:13
```


Performance Routing

Load Sharing Example: PfR Enabled (Route Control)

- **Dual Router WAN Edge**

- HSRP facing LAN hosts
- Requires iBGP config (similar to HQ)
- PfR influences outbound traffic using BGP local-preference (5000)

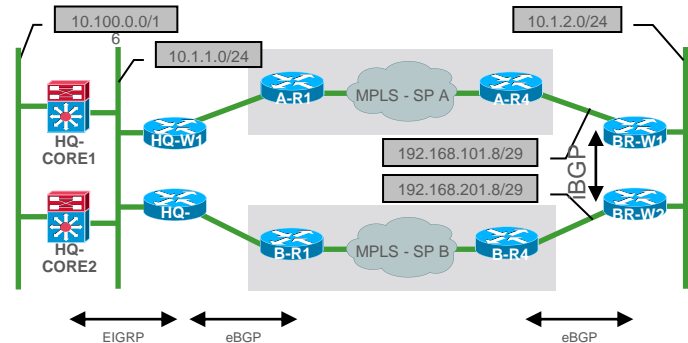

```
BR-W1# show ip bgp
```

Network	Next Hop	Metric	LocPrf	Weight	Path
* i10.100.100.0/24	10.1.2.220	0	100	0	65200 65200 ?
*>	192.168.101.9			0	65100 65100 ?
*>i10.100.200.0/24	10.1.2.220	0	5000	0	65200 65200 ?
*	192.168.101.9			0	65100 65100 ?

```
BR-W1# show ip route
```

```
B 10.100.100.0 [20/0] via 192.168.101.9, 01:08:43
B 10.100.200.0 [200/0] via 10.1.2.220, 00:03:22
```

```
BR-W1#show pfr master
```

```
<snip>
```

```
Global Settings:
```

```
max-range-utilization percent 20 recv 0
```

```
mode route metric bgp local-pref 5000
```

```
mode route metric static tag 5000
```

```
trace probe delay 1000
```

```
no logging
```

```
exit holddown time 60 secs, time remaining 0
```


```
Default Policy Settings: <snip>
```

```
Learn Settings: <snip>
```

Performance Routing

Multiple Paths—Select Best Path by Destination Prefix

- Monitor relevant path characteristics (round trip delay, loss, jitter, ...)
 - path A: <5 ms delay, 0% loss
 - path B: < 50 ms delay, 0% loss
- Accurate measurement of most parameters requires active probes (which leverage IP SLA)
- Each path must be evaluated in each direction independently
- Craft a policy to take advantage of unique link characteristics
 - If both paths are lossless, then prefer the path with lower delay.
 - However, if loss begins to exceed .01% then prefer the lossless path even if it has increased delay.

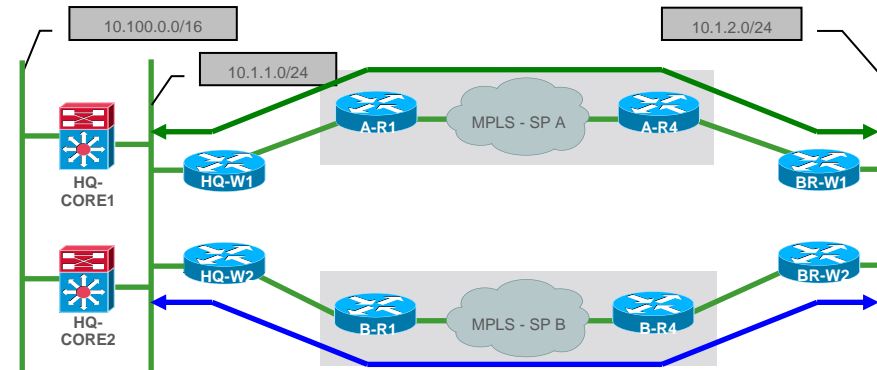


Performance Routing

Active Probe Configuration

```
RTR#  
int FastEthernet0  
ip address 10.100.100.100 255.255.255.0  
!  
ip sla responder
```


- Configure IP SLA Responder on remote router (consider “shadow router”)
- Configure “pfr-map” to monitor desired remote IP prefix(es)
- For performance sensitive traffic, use “mode monitor fast”
- Probes are sourced from Border Routers and routed via external interfaces. Probe return traffic returns via traditional routed path (likely asymmetric)

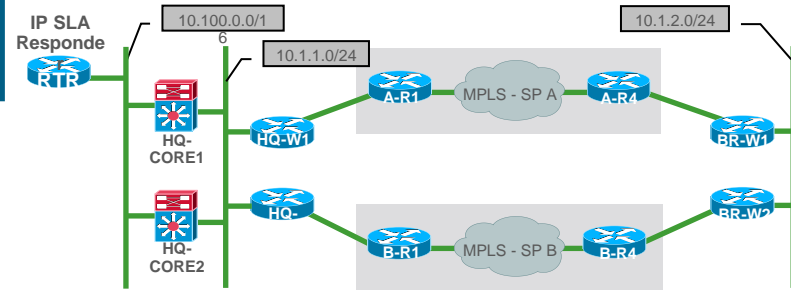

```
BR-W1#  
ip prefix-list HQ-CRITICAL-100 seq 10 permit 10.100.100.0/24  
!  
pfr-map PFR-HQ-FAST-FAILOVER 100  
match traffic-class prefix-list HQ-CRITICAL-100  
set mode route observe  
set mode monitor fast  
set active-probe jitter 10.100.100.100 target-port 5555  
set probe frequency 2  
!  
pfr master  
policy-rules PFR-HQ-FAST-FAILOVER
```

Performance Routing

Active Prefix Monitoring

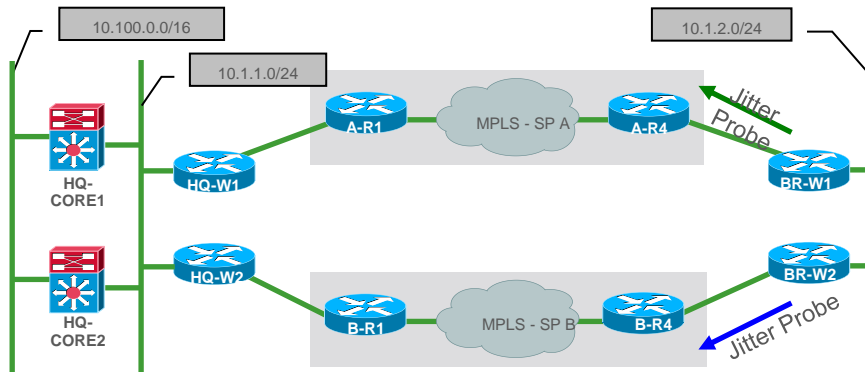

```
BR-W1# show pfr master policy 100
pfr-map PFR-HQ-FAST-FAILOVER 100
match ip prefix-lists: HQ-CRITICAL-100
backoff 300 3000 300
delay relative 50
holddown 300
periodic 0
*probe frequency 2
*mode route observe
*mode monitor fast
mode select-exit best
loss relative 10
jitter threshold 20
mos threshold 3.60 percent 30
unreachable relative 50
next-hop not set
forwarding interface not set
resolve utilization priority 1 variance 5
* Overrides Default Policy Setting
```

```
BR-W1# show pfr master prefix detail
```

```
Prefix: 10.100.100.0/24
```

```
State: INPOLICY* Time Remaining: @0
```

```
Policy: 10
```

```
Most recent data per exit
```

Border	Interface	PasSDly	PasLDly	ActSDly	ActLDly
*10.1.2.120	Fa0/0	0	0	3	3
10.1.2.220	Fa0/0	0	0	28	28

Short/Long Term Delay

```
Most recent voice data per exit
```


Border	Interface	ActSJit	ActPMOS	ActSLos	ActLLos
*10.1.2.120	Fa0/0	0	0	0	0
10.1.2.220	Fa0/0	0	0	0	0

Short/Long Term Loss

Performance Routing

Controlling a Configured Prefix

- Compare loss characteristics of each exit (within 5% considered “same”)
- Next, compare delay characteristics of each exit (within 5% considered “same”)
- Maximum packet loss for an exit is limited to 100 (packets per million) or 0.01%
- Maximum delay for an exit is 100 ms
- Unreachable policy is always considered “highest priority”

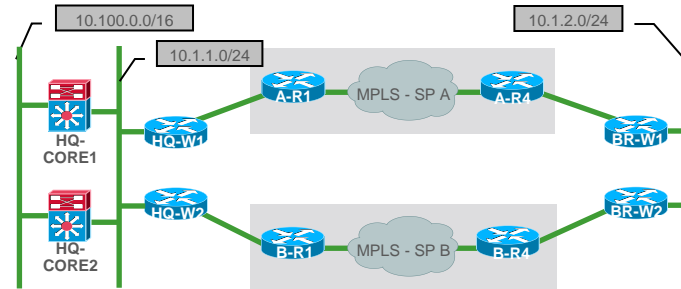

BR-W1#

```
pfr-map PFR-HQ-FAST-FAILOVER 100
no set resolve utilization
set resolve loss priority 1 variance 5
set resolve delay priority 2 variance 5
set loss threshold 100
set delay threshold 100
!
set holddown 90
set periodic 90
set mode select-exit best
!
set mode route control
!
pfr master
policy-rules PFR-HQ-FAST-FAILOVER
```

Performance Routing

Controlling a Configured Prefix

Branch Route Tables – Monitor Only

```
BR-W1# show ip bgp
  Network          Next Hop          Metric LocPrf Weight Path
*> 10.100.0.0/16   192.168.101.9    0      100     0 65100 65100 ?
* i                10.1.2.220      0      100     0 65200 65200 ?
```

```
BR-W2# show ip bgp
  Network          Next Hop          Metric LocPrf Weight Path
* i10.100.0.0/16  10.1.2.120      0      100     0 65100 65100 ?
*>                192.168.201.9   0      100     0 65200 65200 ?
```

PfR Moves the (More Specific) Prefix 10.100.100.0/24 to the Path with Lower Delay

Branch Route Tables – PfR Route Control


```
BR-W1# show ip bgp
  Network          Next Hop          Metric LocPrf Weight Path
*> 10.100.0.0/16   192.168.101.9    0      100     0 65100 65100 ?
* i                10.1.2.220      0      100     0 65200 65200 ?
Prefix Inserted by PfR → *> 10.100.100.0/24 192.168.101.9    0      100     0 65100 65100 ?
```

```
BR-W2# show ip bgp
  Network          Next Hop          Metric LocPrf Weight Path
* i10.100.0.0/16  10.1.2.120      0      100     0 65100 65100 ?
*>                192.168.201.9   0      100     0 65200 65200 ?
Prefix Advertised by PfR via BGP → *>i10.100.100.0/24 10.1.2.120      0      5000    0 65100 65100 ?
```

Performance Routing

Path Disruption: Loss

```
HQ-MC#  
*Mar 3 21:18:53.247: %OER_MC-5-NOTICE: Active ABS Loss OOP Prefix 10.1.2.0/24, loss 5025,  
BR 10.1.1.110, i/f Gi0/1  
*Mar 3 21:18:55.263: %OER_MC-5-NOTICE: Active ABS Loss OOP Prefix 10.1.2.0/24, loss 15228,  
BR 10.1.1.110, i/f Gi0/1  
*Mar 3 21:18:55.267: %OER_MC-5-NOTICE: Route changed Prefix 10.1.2.0/24, BR 10.1.1.210,  
i/f Gi0/1, Reason Loss, OOP Reason Loss
```

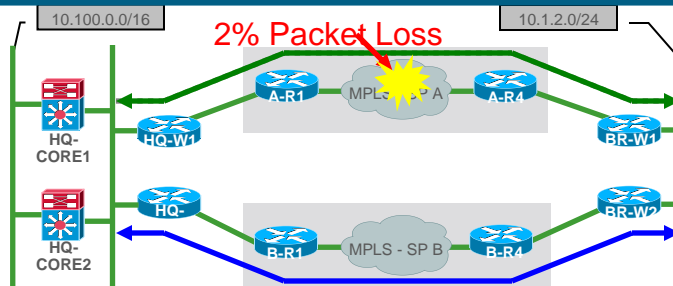

MC = Master Controller
BR = Border Router
OOP = Out Of Policy

```
BR-W1#  
*Mar 3 21:18:53.847: %OER_MC-5-NOTICE: Active ABS Loss OOP Prefix 10.100.100.0/24, loss 4016,  
BR 10.1.2.120, i/f Fa0/0  
*Mar 3 21:18:55.863: %OER_MC-5-NOTICE: Active ABS Loss OOP Prefix 10.100.100.0/24, loss 5025,  
BR 10.1.2.120, i/f Fa0/0  
*Mar 3 21:18:55.867: %OER_MC-5-NOTICE: Route changed Prefix 10.100.100.0/24,  
BR 10.1.2.220, i/f Fa0/0, Reason Loss, OOP Reason Loss
```

Performance Routing

Controlling a Configured Prefix

Branch Route Tables – PfR Route Control – SP A Preferred normal conditions

```
BR-W1# show ip bgp
  Network                Next Hop                Metric LocPrf Weight Path
*> 10.100.0.0/16         192.168.101.9           0      100    0 65100 65100 ?
* i                      10.1.2.220              0      100    0 65200 65200 ?
*> 10.100.100.0/24      192.168.101.9           0      100    0 65100 65100 ?
```

Prefix Controlled by PfR →

```
BR-W2# show ip bgp
  Network                Next Hop                Metric LocPrf Weight Path
* i10.100.0.0/16        10.1.2.120              0      100    0 65100 65100 ?
*>                       192.168.201.9           0      100    0 65200 65200 ?
*>i10.100.100.0/24      10.1.2.120              0      5000   0 65100 65100 ?
```

Prefix Controlled by PfR →

PfR Moves the Prefix 10.100.100.0/24 to the Loss Free Path

Branch Route Tables – PfR Route Control – SP B Preferred with loss on SP A

```
BR-W1# show ip bgp
  Network                Next Hop                Metric LocPrf Weight Path
*> 10.100.0.0/16         192.168.101.9           0      100    0 65100 65100 ?
* i                      192.168.201.9           0      100    0 65200 65200 ?
*>i10.100.100.0/24      10.1.2.220              0      5000   0 65200 65200 ?
```

Prefix Controlled by PfR →


```
BR-W2# show ip bgp
  Network                Next Hop                Metric LocPrf Weight Path
* i10.100.0.0/16        10.1.2.120              0      100    0 65100 65100 ?
*>                       192.168.201.9           0      100    0 65200 65200 ?
*> 10.100.100.0/24      192.168.201.9           0      100    0 65200 65200 ?
```

Prefix Controlled by PfR →

Performance Routing

Multiple Paths—Select Best Path by Application

- Monitor relevant path characteristics (round trip delay, loss, jitter, ...)
 - path A: <5 ms delay, 0% loss, 0% jitter
 - path B: < 50 ms delay, 0% loss, 0% jitter
- Craft a policy to take advantage of unique link characteristics
 - If both paths are free of loss and jitter, then prefer the path with lower delay.
 - However, if jitter begins to exceed 20ms, then prefer jitter free path even if it has increased delay
 - If loss begins to exceed .01% then prefer the lossless path even if it has increased delay or jitter.

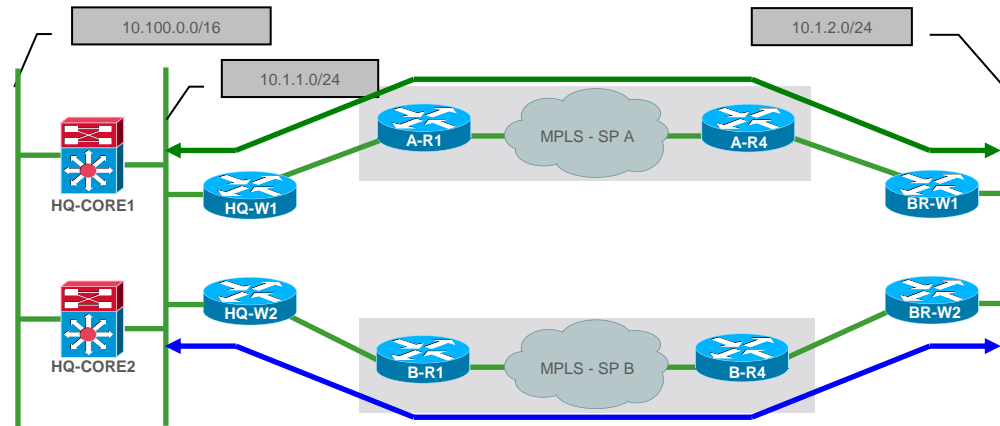


Performance Routing

Application Specific Monitoring

- Characterise the traffic of interest
- Configure “pfr-map” to monitor desired application (and src/dst)
- For performance sensitive traffic, use “mode monitor fast”


We place this line in the pfr-map prior to others to make it higher priority

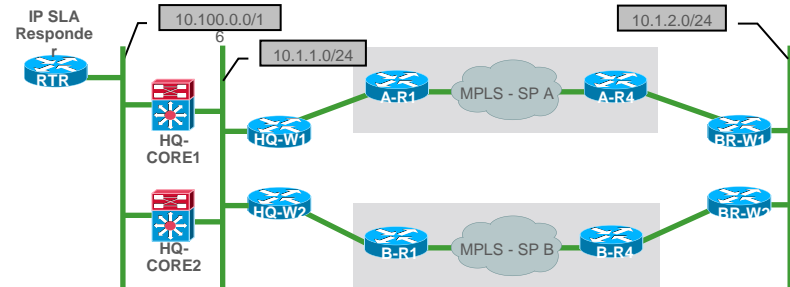

```
BR-W1#
ip access-list extended VOICE-ACL
 permit udp any range 16384 32767 10.100.100.0 0.0.0.255 range
 16384 32767
!
pfr-map PFR-HQ-FAST-FAILOVER 10
 match traffic-class access-list VOICE-ACL
 set mode route observe
 set mode monitor fast
 set active-probe jitter 10.100.100.100 target-port 22345
 set probe frequency 2
!
pfr master
 policy-rules PFR-HQ-FAST-FAILOVER
```

Performance Routing

Application Specific Monitoring

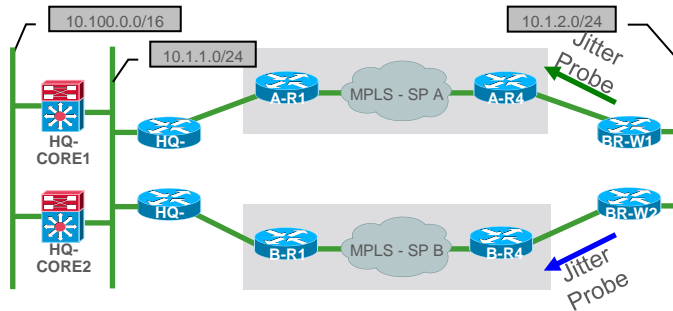

Short Term Jitter

```
BR-W1# show pfr master traffic-class detail
Prefix: 10.100.100.0/24  Protocol: 17  Port: [16384, 32767] [16384, 32767] DSCP: 0
State: INPOLICY  Time Remaining: @22
Policy: 10

Most recent data per exit
Border      Interface      PasSDly  PasLDly  ActSDly  ActLDly
*10.1.2.120 Fa0/0          0         0         3         3
10.1.2.220  Fa0/0          0         0         28        28

Most recent voice data per exit
Border      Interface      ActSJit  ActPMOS  ActSLos  ActLLos
*10.1.2.120 Fa0/0          0         0         0         0
10.1.2.220  Fa0/0          0         0         0         0
```


Short/Long Term Delay

Short/Long Term Loss

Performance Routing

Controlling a Configured Application

- Compare loss characteristics of each exit (within 5% considered “same”)
- Next, compare jitter characteristics of each exit (within 5% considered “same”)
- Finally, compare delay characteristics of each exit (within 5% considered “same”)
- Maximum packet loss for an exit is limited to 100 (packets per million) or 0.01%
- Maximum jitter for an exit is 20 ms
- Maximum delay for an exit is 100 ms
- Unreachable policy is always considered “highest priority”

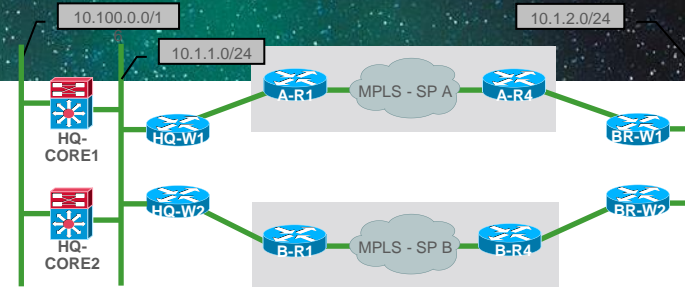

```
BR-W1#
pfr-map PFR-HQ-FAST-FAILOVER 10
no set resolve utilization
set resolve loss priority 1 variance 5
set resolve jitter priority 2 variance 5
set resolve delay priority 3 variance 5
set loss threshold 100
set jitter threshold 20
set delay threshold 100
!
set holddown 90
set periodic 90
set mode select-exit best
!
set mode route control
!
pfr master
policy-rules PFR-HQ-VOICE
```


Agenda

- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
- Design and Deployment
 - Dual WAN
 - MPLS Dual Carrier
 - MPLS + Internet
- Final Wrap Up

DUAL WAN (MPLS + Backup)

PE-CE Protocol: BGP, Tunnel Protocol: EIGRP

- Headquarters WAN Edge
 - W1 learns Branch route via eBGP
 - W2 learns Branch route via EIGRP
- Headquarters Core
 - W1 redistributes eBGP into EIGRP, results in **EIGRP external**
 - W2 does not require redistribution, results in **EIGRP internal**
 - Core1, Core2 install Branch route via W2

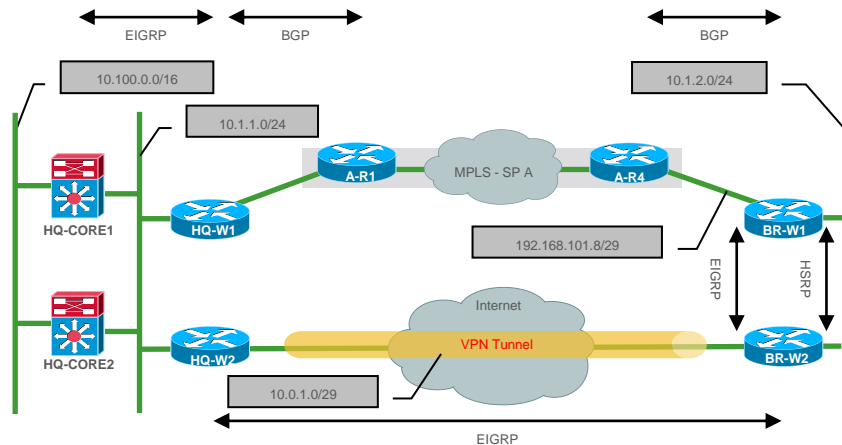

```
HQ-W1# show ip route
B 10.1.2.0/24 [20/0] via 192.168.101.2, 05:24:01
```

```
HQ-W2# show ip route
D 10.1.2.0/24 [90/26882560] via 10.0.1.2, 00:00:04, Tunnel1
```

```
HQ-CORE1# show ip route
D 10.1.2.0/24 [90/26882816] via 10.1.1.210, 00:02:32, Vlan10
```

HQ to Branch Traffic
Flows Across **Tunnel**


DUAL WAN (MPLS + Backup)

PE-CE Protocol: BGP, Tunnel Protocol: EIGRP

- Branch WAN Edge

- W1 learns HQ route via eBGP
- W2 learns HQ route via EIGRP
- No redistribution configured
- HSRP Primary is on W1

Branch to HQ Traffic Flows Across MPLS

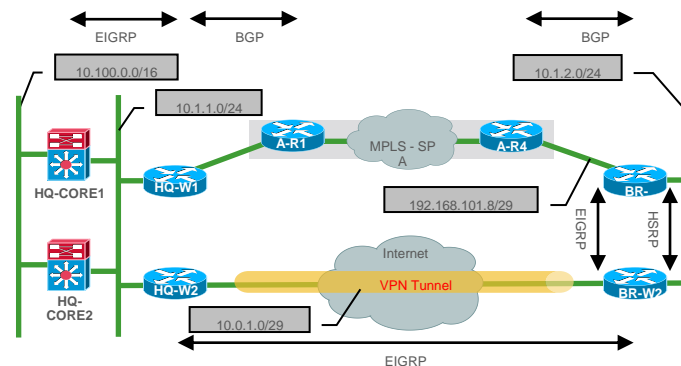

```
BR-W1# show ip route
B    10.100.100.0/24 [20/0] via 192.168.101.9, 04:48:58
B    10.100.200.0/24 [20/0] via 192.168.101.9, 03:44:06
```


```
BR-W2# show ip route
D    10.100.100.0/24 [90/26882816] via 10.0.1.1, 00:10:56, Tunnel1
D    10.100.200.0/24 [90/26882816] via 10.0.1.1, 00:10:57, Tunnel1
```

```
BR-W1# show standby brief
      P indicates configured to preempt.
      |
Interface Grp Pri P State Active Standby Virtual IP
Fa0/1     1   110 P Active local 10.1.2.220 10.1.2.1
```

DUAL WAN (MPLS + Backup)

PE-CE Protocol: BGP, Tunnel Protocol: EIGRP

- How to force HQ to Branch traffic across MPLS (primary)?
 - Adjust administrative distance of EIGRP routes learned via tunnel
 - Ensure new distance is higher than that of EIGRP external (170)

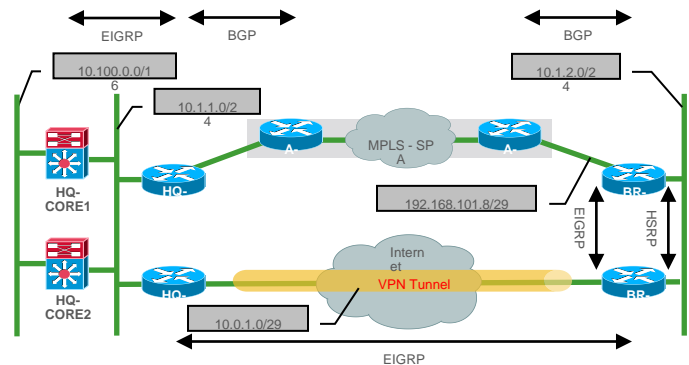

```
HQ-W2#  
router eigrp 65110  
network 10.0.1.0 0.0.0.7  
distance 195 10.0.1.0 0.0.0.7
```

```
HQ-W1# show ip route  
B 10.1.2.0/24 [20/0] via 192.168.101.2, 05:24:01
```

```
HQ-W2# show ip route  
D EX 10.1.2.0/24 [170/261120] via 10.1.1.110, 00:07:25, GigE0/0
```

```
HQ-CORE1# show ip route  
D EX 10.1.2.0/24 [170/258816] via 10.1.1.110, 00:08:44, Vlan10
```


Now:

HQ to Branch Traffic
Flows Across MPLS

DUAL WAN (MPLS + Backup)

MPLS Failure

- Failure within MPLS cloud
- Worst Case
 - Primary dependency is BGP timers
 - Results in end to end convergence time as long as BGP Holdtime
 - Could be much lower with BGP tuning and use of BFD

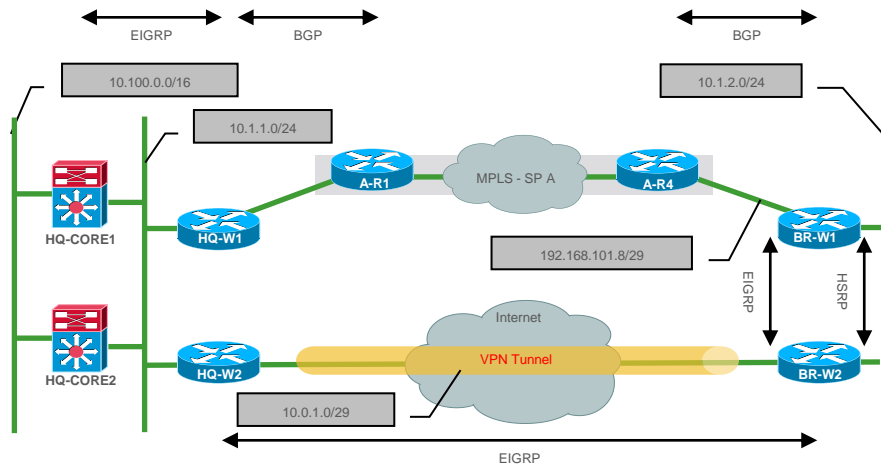

HQ Route Tables

```
HQ-W2# show ip route
D    10.1.2.0/24 [195/26882560] via 10.0.1.2, 00:06:46, Tunnel1
```

```
HQ-CORE1# show ip route
D    10.1.2.0/24 [90/26882816] via 10.1.1.210, 00:09:18, Vlan10
```


After Failure:

HQ to Branch Traffic
Flows Across Tunnel

DUAL WAN (MPLS + Backup)

MPLS Failure

- Failure within MPLS cloud
- Suboptimal routing at Branch
 - HSRP primary remains unchanged at BR-W1
 - Could use EOT and move HSRP primary to BR-W2

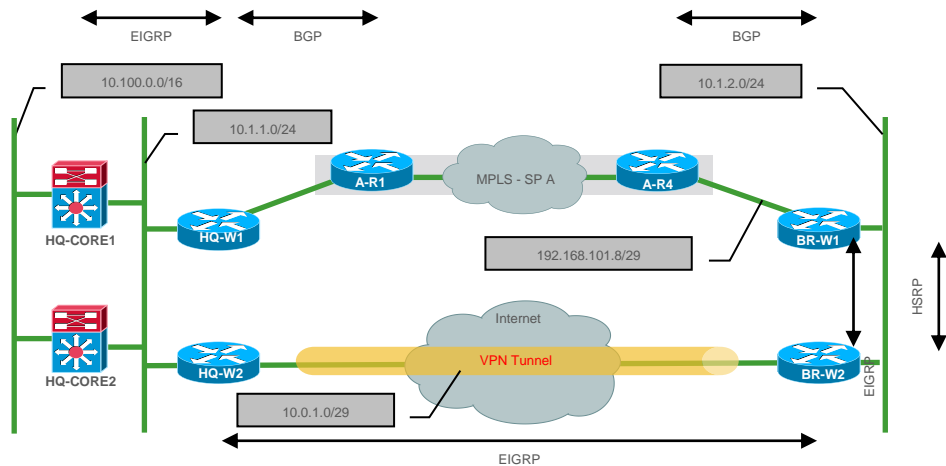

Branch Route Tables

```
BR-W1# show ip route
D    10.100.100.0/24
     [90/26885376] via 10.1.2.220, 00:22:42, FastEthernet0/1
D    10.100.200.0/24
     [90/26885376] via 10.1.2.220, 00:22:42, FastEthernet0/1
```

```
BR-W2# show ip route
D    10.100.100.0/24 [90/26882816] via 10.0.1.1, 01:08:44, Tunnel1
D    10.100.200.0/24 [90/26882816] via 10.0.1.1, 01:08:45, Tunnel1
```


After Failure:

Branch to HQ Traffic
Flows Across Tunnel

DUAL WAN (MPLS + Backup)

PE-CE Protocol: BGP, Tunnel Protocol: EIGRP

- Options for PfR with Multiple Routing Protocols
 - PIRO – Protocol Independent Route Optimisation
 - EIGRP Route Control (requires EIGRP only as route source for WAN)

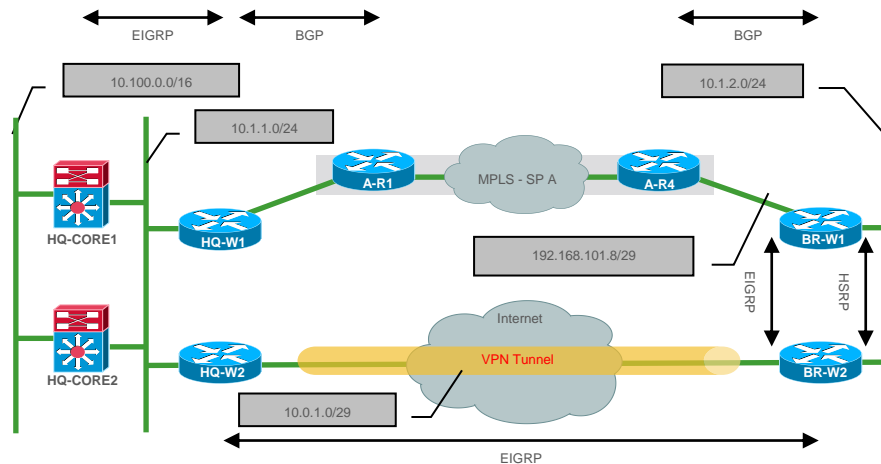

PIRO [12.4(24)T]

Supports Application Specific Monitoring (Dynamic Policy Routing)

Supports Hybrid BGP/EIGRP Topology with “mode route protocol pbr” - Requires 15.0(1)M4


Requires BR-BR Direct Neighbour Relationship

```
HQ-MC#  
pfr master  
mode route protocol pbr
```

Performance Routing – WAN Aggregation


Application Control via Dynamic PBR

Core/Distribution

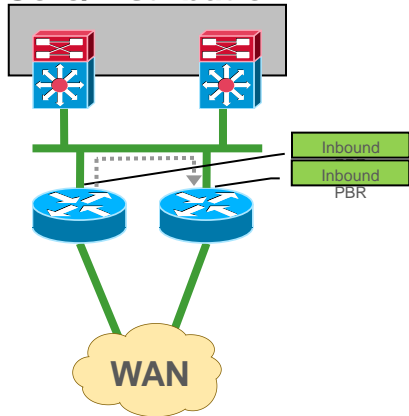


Supported Design

Core/Distribution

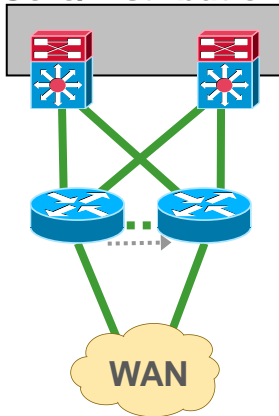

Requires Edge Router Link

Core/Distribution

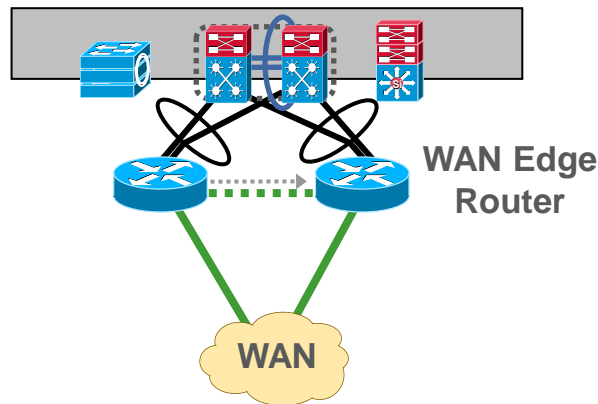

.....

Performance Routing

Controlling a Configured Application

Chosen Exit

Points to A-R4
(via External)



```
BR-W1# show ip policy
Interface Route map
Fa0/1      OER-03/04/09-17:43:17.387-F-OER (Dynamic)

BR-W1# show route-map dynamic
route-map OER-03/04/09-17:43:17.387-F-OER, permit, sequence 0, identifier 1200584152
Match clauses:
  ip address (access-lists): oer#15
Set clauses:
  ip next-hop 192.168.101.9
  interface FastEthernet0/0
Policy routing matches: 1040 packets, 7690 bytes
Current active dynamic routemaps = 1

BR-W1# show ip access-lists dynamic
Extended IP access list oer#15
 1073741823 permit udp any range 16384 32767 10.100.100.0 0.0.0.255 range 16384
32767
```

Using Policy Based Routing

Dynamic Route Map Pointing
Specified Traffic to Preferred
Interface and Next Hop
Address

Dynamic ACL on BR
duplicating the one
configured on MC



Inactive Exit

Points to BR-W1
(via Internal)



```
BR-W2# show ip policy
Interface Route map
Fa0/1      OER-03/04/09-17:43:17.979-22-OER (Dynamic)

BR-W2# show route-map dynamic
route-map OER-03/04/09-17:43:17.979-22-OER, permit, sequence 0, identifier
1194973244
Match clauses:
  ip address (access-lists): oer#15
Set clauses:
  ip next-hop 10.1.2.120
  interface FastEthernet0/1
Policy routing matches: 0 packets, 0 bytes
Current active dynamic routemaps = 1

BR-W2# show ip access-lists dynamic
Extended IP access list oer#15
 1073741823 permit udp any range 16384 32767 10.100.100.0 0.0.0.255 range 16384
32767
```

Performance Routing

Link Groups

Provide preference for specific traffic to traverse dedicated links

MPLS DMVPN Tunnel with known SLA →

Internet DMVPN Tunnel →

MPLS DMVPN Tunnel with known SLA →

Use MPLS unless Out of Policy →

Category of Interface specified by link-group

```
BR-W1#
pfr master
  border 10.0.0.3 key-chain pfr
    interface Ethernet0/0 internal
    interface Tunnell external
      link-group MPLS
    !
  border 10.0.0.4 key-chain pfr
    interface Ethernet0/0 internal
    interface Tunnel0 external
      link-group INTERNET
    interface Tunnell external
      link-group MPLS
    !
pfr-map NETWORKERS 10
  set link-group MPLS fallback INTERNET
```

Performance Routing

Target Discovery

Simplification of configuration
via MC to MC peering

Head-end Configuration →

Local Prefixes →

Local IP SLA Responders →

Required for dedicated Responder

```
HQ-MC#
pfr master
 mc-peer domain 1 head-end Loopback0
 target-discovery responder-list RESPONDER_PREFIX inside-prefixes LOCAL_PREFIX
 !
 ip prefix-list LOCAL_PREFIX seq 5 permit 10.1.0.0/16
 !
 ip prefix-list RESPONDER_PREFIX seq 5 permit 10.0.0.12/32
```

```
BR-W1#
pfr master
 policy-rules NETWORKERS
 mc-peer domain 1 10.0.0.13 Loopback0
 target-discovery
```

HQ-MC Loopback 0 from Loopback 0 →

Can only use a loopback interface for peering

Only need to state target-discovery on branch

Internal Interface address will be used for probe RESPONDER_PREFIX

LOCAL_PREFIX will be discovered upon traffic initiation

```
BR-W1#show pfr master target-discovery
PfR Target-Discovery Services
 Mode: Dynamic Domain: 1
 SvcRtg: client-handle: 1 sub-handle: 1 pub-seq: 0
PfR Target-Discovery Database (local)
 Local-ID: 10.0.0.41 Desc: BR-W1
 Target-list: 10.1.40.1
 Prefix-list: empty-
PfR Target-Discovery Database (remote)
 MC-peer: 10.0.0.13 Desc: HQ-MC
 Target-list: 10.0.0.12
 Prefix-list: 10.1.0.0/16
```

Each MC announces its inside prefixes,
together with probe target address and
site names

Performance Routing

Target Discovery

Learn List

Learn List to Filter



Learn based on ACL



Use of Learn List



Actively probe all exits
when traffic is present



No Probe Configuration
Target Discovery is used



```
BR-W1#
pfr master
policy-rules NETWORKERS
! <SNIP>
learn
  list seq 10 refname LEARN_VOICE_VIDEO
  traffic-class access-list VOICE_VIDEO filter LOCAL_PREFIX
  throughput
  list seq 20 refname LEARN_CRITICAL
  traffic-class access-list CRITICAL filter LOCAL_PREFIX
  throughput
!
ip access-list extended VOICE_VIDEO
  permit ip any any dscp ef
  permit ip any any dscp af41
!
pfr-map NETWORKERS 10
  match pfr learn list LEARN_VOICE_VIDEO
  set periodic 90
  set delay threshold 200
  set mode monitor fast
  set resolve loss priority 2 variance 5
  set resolve jitter priority 3 variance 5
  set resolve delay priority 4 variance 5
  set loss threshold 50000
  set jitter threshold 30
  set probe frequency 8
  set link-group MPLS fallback INTERNET
```


Performance Routing

Target Discovery

What are we learning and monitoring

How Learned →

Learned Prefixes →

What Probes are Running →

Probes are dynamically run when traffic is active

```
BR-W1#show pfr master learn list
Learn-List seq 10 refname LEARN_VOICE_VIDEO
Configuration:
  Traffic-Class Access-list: VOICE_VIDEO
  Filter: LOCAL_PREFIX
  Aggregation-type: prefix-length 32
  Learn type: throughput
  Session count: 1000 Max count: 1000
  Policies assigned: 10
  Status: ACTIVE
Stats:
  Traffic-Class Count: 2
  Traffic-Class Learned:
    Appl Prefix 10.20.1.0/24 ef 256
    Appl Prefix 10.20.2.0/24 ef 256
```

```
BR-W1#show pfr master active-probes target-discovery
PFR Master Controller active-probes (TD)
Border = Border Router running this probe
MC-Peer = Remote MC associated with this target
Type = Probe Type
Target = Target Address
TPort = Target Port
N - Not applicable
```

Destination Site Peer Addresses:

MC-Peer	Targets
10.0.0.4	10.0.0.4, 10.0.0.3

The following Probes are running:

Border	Idx	State	MC-Peer	Type	Target	TPort
10.0.0.1	10	TD-Actv	10.0.0.4	jitter	10.0.0.4	5000
10.0.0.1	10	TD-Actv	10.0.0.4	jitter	10.0.0.3	5000
10.0.0.2	10	TD-Actv	10.0.0.4	jitter	10.0.0.4	5000
10.0.0.2	10	TD-Actv	10.0.0.4	jitter	10.0.0.3	5000

Agenda

- Introduction
- Cisco IOS and IP Routing
- Convergence Techniques
- Design and Deployment
- Final Wrap Up
 - Key Takeaways

Key Takeaways

- Outages can manifest in many different ways. Network design should be based on application requirements to survive various outages.
- Cisco IOS has inherent load sharing capabilities. Analyse your network topology and use these to your advantage.
- End-to-end convergence time is a critical metric. Understand how localised topology changes affect end-to-end resiliency.
- Multiple links/paths not only increase network reliability but can improve application performance.

Key Takeaways

- IP SLA based monitoring can detect outage types that are virtually undetectable by traditional “hello based” techniques.
- Performance Routing permits path selection based on current real time characteristics.
- Most effective network designs incorporate a combination of convergence techniques

Additional Sessions of Interest

- BRKRST-2362 Deploying Performance Routing
- LTRRST-2006 Deploying and Operating Performance Routing
- BRKAPP-2030 Application Visibility and Control in Enterprise WAN
- LTRCRS-3141 IWAN – Intelligent WAN, Enabling The Next Generation Branch



Q & A

Complete Your Online Session Evaluation

Give us your feedback and receive a Cisco Live 2014 Polo Shirt!

Complete your Overall Event Survey and 5 Session Evaluations.

- Directly from your mobile device on the Cisco Live Mobile App
- By visiting the Cisco Live Mobile Site www.ciscoliveaustralia.com/mobile
- Visit any Cisco Live Internet Station located throughout the venue

Polo Shirts can be collected in the World of Solutions on Friday 21 March 12:00pm - 2:00pm



Learn online with Cisco Live!

Visit us online after the conference for full access to session videos and presentations.

www.CiscoLiveAPAC.com



CISCO TM